

TRANSMITTAL LETTER TO THE UNITED STATES
 DESIGNATED/ELECTED OFFICE (DO/EO/US)
 CONCERNING A FILING UNDER 35 U.S.C. 371

Attorney's Docket Number

01165.0781

U.S. Application No.

09/530008

International Application. No.	International Filing Date	Priority Date Claimed
PCT/JP99/04590	August 25, 1999	August 25, 1998

Title of Invention:

A LIQUID CRYSTAL DISPLAY APPARATUS AND A METHOD FOR MANUFACTURING THE SAME

Applicants For DO/EO/US: 1) Yasushi KANEKO and 2) Hiroshi TSUKADA

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.
14. ☐ A SECOND or SUBSEQUENT preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
16. ☐ Other items or information:
 - a. ☐ Verified Small Entity Statement.
 - b. ☐ Copy of Notification of Missing Requirements.

17. [X] The following fees are submitted:

Basic National Fee (37 CFR 1.492(a)(1)-(5)):

CALCULATIONS

Search Report has been prepared by the EPO or JPO.....\$840.00

\$ 840.00

International preliminary examination fee paid to

USPTO (37 CFR 1.482).....\$670.00

No international preliminary examination fee paid to

USPTO (37 CFR 1.482) but international search fee

paid to USPTO (37 CFR 1.445(a)(2)).....\$690.00

Neither international preliminary examination fee

(37 CFR 1.482) nor international search fee

(37 CFR 1.445(a)(2)) paid to USPTO.....\$970.00

International preliminary examination fee paid to USPTO

(37 CFR 1.482) and all claims satisfied provisions

of PCT Article 33(1)-(4).....\$ 96.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

\$ 840.00

Surcharge of \$130.00 for furnishing the oath or declaration later than

[] 20 [] 30 months from the earliest claimed priority date

(37 CFR 1.492(e)).

\$

Claims	Number Filed	Number Extra	Rate	
Total Claims	15 -20=	0	X \$18.00	\$
Independent Claims	3 - 3=	0	X \$78.00	\$
Multiple dependent claim(s) (if applicable)			+\$260.00	\$ 260.00

TOTAL OF ABOVE CALCULATIONS =

\$ 1100.00

Reduction by 1/2 for filing by small entity, if applicable. Verified

Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28)

\$

SUBTOTAL =

\$ 1100.00

Processing fee of \$130.00 for furnishing the English translation later than [] 20 [] 30 months from the earliest claimed priority date

(37 CFR 1.492(f)).

\$

TOTAL NATIONAL FEE =

\$ 1100.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet

(37 CFR 3.28, 3.31).

\$40.00 per property +

\$ 40.00

TOTAL FEES ENCLOSED =

\$ 1140.00

Amount to be

refunded \$

charged \$

a. [X] A check in the amount of \$ 1140.00 to cover the above fees is enclosed.

b. [] Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. [X] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 06-0916. A duplicate copy of this sheet is enclosed.

The Commissioner is hereby authorized to charge any other fees due under 37 C.F.R. §1.16 or §1.17 during the pendency of this application to our Deposit Account No. 06-0916.

SEND ALL CORRESPONDENCE TO:

Finnegan, Henderson, Farabow

Garrett & Dunner, L.L.P.

1300 I Street, N.W.

Washington, D.C. 20005-3315

EFC/FPD/sci

Ernest F. Chapman

Reg. No. 25,961

Submitted: April 24, 2000

446 Rec'd PCT/PTO 24 APR 2000

SPECIFICATIONA LIQUID CRYSTAL DISPLAY APPARATUS AND A METHOD
FOR MANUFACTURING THE SAME

5 TECHNICAL FIELD

The present invention relates to a liquid crystal display apparatus and a method for manufacturing the same. In particular, it relates to a liquid crystal display apparatus and a method for manufacturing the same which defines an optimum arrangement of STN-type liquid crystal devices and structural components each connected to the liquid crystal devices, in order to realize a high quality image. The present invention can be advantageously applied to a liquid crystal display unit used in a portable terminal, a game apparatus used as a toy, etc.

15 BACKGROUND ART

For example, an STN-type liquid crystal apparatus has been disclosed in Japanese Unexamined Patent Publication No. 7-191296 (published date: July 28, 1995, "A liquid crystal apparatus"). This liquid apparatus includes a display cell holding a nematic liquid crystal layer between a first substrate having a first transparent electrode and a second substrate having a second transparent electrode, and an optical anisotropic member for correcting a phase difference structured using a polymer film or a compensating liquid crystal cell between a second polarization board and the second substrate which are provided between a first polarization board and the second polarization board.

According to this document, the nematic liquid crystal layer of the display cell (corresponding to the liquid crystal devices) is twisted and oriented by 120° or more, and a twist angle and a retardation $\Delta n d$ of the optical anisotropic body are set to predetermined conditions in accordance with the twist angle of the

nematic liquid crystal layer and the retardation $\Delta n d$ which is obtained by a product of a double refractive index Δn and a gap "d" between substrates, so that undesirable color on the display, occurring during a turned on/off state of the liquid crystal devices, can be resolved.

In this document, however, since the twist angle and the retardation $\Delta n d$ of the optical anisotropic member (corresponding to the twisted phase difference board) are set in accordance with the twist angle and the retardation $\Delta n d$ of the nematic liquid crystal layer, the following items (1) to (6) have not yet defined concretely. That is, (1) a relationship of an angle between a direction of the twist angle of the twisted phase difference board and the direction of the twist angle of the liquid crystal device; (2) the relationship of the angle between an oriented direction of the liquid crystal molecule of an alignment film of the second substrate and a molecule-oriented direction of a lower polymer of the twisted phase difference board; (3) the relationship of the angle between an absorption axis of the first polarization board and the oriented direction of the liquid crystal molecule of the alignment film of the first substrate; (4) the relationship of an angle between an absorption axis of the second polarization board and the oriented direction of the molecule of an upper polymer of the twisted phase difference board; (5) the relationship between the double refractive index of the nematic liquid crystal layer and the double refractive index of the twisted phase difference board; and (6) preferential view angles at the liquid crystal layer of the liquid crystal device. Accordingly, in this document, an optimum display quality has not yet been realized for resolving undesirable color on the display occurring during the turned on/off state of the liquid crystal device.

DISCLOSURE OF THE INVENTION

The purpose of the present invention is to provide a liquid crystal display apparatus which can resolve undesirable color on the display and can realize bright and high contrast image quality, based on data obtained through various experiments, by defining concretely the relationship of each angle described in the above items (1) to (6).

Another purpose of the present invention is to provide a method for manufacturing the above liquid crystal display apparatus which can effectively determine a cutting size of a material (below, material-cutting) for the structural component based on the structure of the above liquid crystal display apparatus so that it is possible to considerably reduce the manufacturing cost and to improve the productivity when manufacturing the liquid crystal display apparatus.

According to the first aspect of the present invention, in the liquid crystal display apparatus comprising a first substrate having a first transparent electrode and a second substrate having a second transparent electrode; liquid crystal devices holding the nematic liquid crystal layer which is twisted and oriented by the twist angle of the STN (preferably, in the range of 180° to 270°) between the first and second substrates; the first polarization board which is provided for an outside of the first substrate; the twisted phase difference board having the liquid crystal polymer layer and provided for the outside of the second substrate; and the second polarization board provided for the outside of the twisted phase difference board.

The twisted direction of the twist angle of the molecule orientation of the twisted phase difference board is reverse to the direction of the twisted orientation of the liquid crystal molecule of the liquid crystal devices, and the twist angle of the twisted phase difference board is structured with an angle smaller than

the twist angle of the liquid crystal device by 10° to 40° .

Preferably, an angle between the oriented direction of the liquid crystal molecule of the alignment film of the second substrate and the molecule-oriented direction of the lower polymer of the liquid crystal polymer layer lies in the range of 80° to 90° , and the angle between the absorption axis of the first polarization board and the molecule-oriented direction of the alignment film of the first substrate lies in the range of 50° to 60° , and further the angle between the absorption axis of the second polarization board and the molecule-oriented direction of the upper polymer of the liquid crystal polymer layer lies in the range of 30° to 40° .

Further, preferably, in the relationship between the retardation $\Delta n_1 d_1$ which is obtained by the product of the double refractive index Δn_1 of the nematic liquid crystal layer and the thickness d_1 of the liquid crystal layer, and the retardation $\Delta n_2 d_2$ which is obtained by the product of the double refractive index Δn_2 of the liquid crystal polymer layer and the thickness d_2 of the liquid crystal polymer layer, the retardation $\Delta n_1 d_1$ lies in the range of 0.7 to $0.9 \mu\text{m}$, and the difference $\Delta n_1 d_1 - \Delta n_2 d_2$ lies in the range of 0.1 to $0.3 \mu\text{m}$.

Still further, preferably, the direction of the preferential view angle of the liquid crystal device is set to any one direction of the hands of a clock showing two-thirty, four-thirty, seven-thirty, or ten-thirty.

Still further, preferably, the second polarization board and the twisted phase difference board structures a bonding unit. In the bonding unit, by utilizing the fact that the angle between the absorption axis of the second polarization board and the molecule-oriented direction of the upper polymer of the liquid crystal polymer layer lies in the range of 30° to 40° , the second polarization

board structured of a rolled film and the twisted phase difference board also structured of a rolled film, are superposed on each other and bonded in the same roll-out direction. After bonding to each other, the bonding unit
5 can be obtained by cutting to a predetermined size.

Still further, preferably, the liquid crystal polymer layer of the twisted phase difference board has a temperature compensating characteristic in which the retardation Δn_2 is always smaller than the retardation
10 Δn_1 of the nematic liquid crystal layer in a predetermined temperature range (preferably, 20°C to 80°C).

According to the second aspect of the present invention, in the method for manufacturing the liquid
15 crystal display apparatus comprising the first substrate having the first transparent electrode and the second substrate having the second transparent electrode; the liquid crystal devices holding the nematic liquid crystal layer which is twisted and oriented by the twist angle of
20 the STN (preferably, in the range of 180° to 270°) between the first and second substrates; the first polarization board which is provided for an outside of the first substrate; the twisted phase difference board having the liquid crystal polymer layer and provided for
25 the outside of the second substrate; and the second polarization board provided for the outside of the twisted phase difference board; wherein the angle between the absorption axis of the second polarization board and the molecule-oriented direction of the upper polymer of
30 the liquid crystal polymer layer lies in the range of 30° to 40°,

- a) structuring the second polarization board in the shape of a rolled film;
- b) structuring the twisted phase difference board
35 in the shape of a rolled film;
- c) by utilizing the fact that the angle lies in

the range of 30° to 40° , arranging the roll-out direction of the rolled film of the second polarization board so as to become the same roll-out direction of the rolled film of the twisted phase difference board;

5 d) superposing the rolled film of the second polarization board on the rolled film of the twisted phase difference board, and adhering these rolled films when simultaneously rolling out these rolled films; and

10 e) manufacturing the bonding unit structured by the second polarization board and the twisted phase difference board by cutting the bonding unit to the predetermined size after an adhesion step.

BRIEF EXPLANATION OF THE DRAWINGS

15 Figure 1 is an essential structural view of the liquid crystal display apparatus of the present invention;

20 Figure 2 shows data of various angles when performing experiments 1 to 7 by changing angles arranged between the twisted phase difference board and the polarization board using the twisted phase difference board used in the present invention;

25 Figure 3 shows data of the relationship of the arranged angles when a desirable display image was finally obtained based on the data shown in the following Figs. 4 to 10, and is shown by the data expressed based in the same manner as shown in Fig. 2;

30 Figure 4 is a graph which corresponds to experiment 1 in Fig. 2 for indicating the relationship between the retardation $\Delta n d$ and the transmission factor of the twisted phase difference board;

 Figure 5 is a graph which corresponds to experiment 2 in Fig. 2 for indicating the relationship between the retardation $\Delta n d$ and the transmission factor of the twisted phase difference board;

35 Figure 6 is a graph which corresponds to experiment 3 in Fig. 2 for indicating the spectral

transmission factor and the relationship of the arranged angle of the upper polarization board;

Figure 7 is a graph which corresponds to experiment 4 in Fig. 2 for indicating the supply
5 voltage/transmission factor and the relationship of the arranged angle of the upper polarization board;

Figure 8 is a graph which corresponds to experiment 5 in Fig. 2 for indicating the supply
10 voltage/transmission factor and the relationship of the arranged angle of the lower polarization board;

Figure 9 is a graph which corresponds to experiment 6 in Fig. 2 for indicating the spectral transmission factor showing the result of the above-mentioned data;

15 Figure 10 is a graph which corresponds to experiment 7 in Fig. 2 for indicating the spectral transmission factor based on the relationship between the twisted phase difference board and the twist angle;

Figure 11 is a graph of the spectral transmission
20 factor of the liquid crystal display apparatus using a uniaxial-oriented film;

Figure 12 is an explanatory view for schematically explaining the relationship of the arranged angle which is shown by experiment 1 in Fig. 2;

25 Figure 13 is an explanatory view for schematically explaining the relationship of the arranged angle which is shown by experiment 2 in Fig. 2;

Figure 14 is an explanatory view for schematically explaining the relationship of the arranged angle which
30 is shown by experiment 3 in Fig. 2;

Figure 15 is an explanatory view for schematically explaining the relationship of the arranged angle which is shown by experiment 4 in Fig. 2;

35 Figure 16 is an explanatory view for schematically explaining the relationship of the arranged angle which is shown by experiment 5 in Fig. 2;

Figure 17 is an explanatory view for schematically

explaining the relationship of the arranged angle which is shown by experiment 6 in Fig. 2;

Figure 18 is an explanatory view for schematically explaining the relationship of the arranged angle which is shown by experiment 7 in Fig. 2;

Figure 19 is an explanatory view for schematically explaining the relationship of the arranged angle which corresponds to "FINAL 1" in Fig. 3;

Figure 20 is an explanatory view for schematically explaining the relationship of the arranged angle which corresponds to "FINAL 2" in Fig. 3;

Figure 21 is an explanatory view for schematically explaining the relationship of the arranged angle which corresponds to "FINAL 3" in Fig. 3;

Figure 22 is an explanatory view for indicating evaluation of the image quality of the liquid crystal display apparatus which is provided by the relationship of the arranged angles of "FINAL 1" to "FINAL 3" shown in Fig. 3;

Figure 23 is a chromaticity diagram indicating a white color at the turned off state of the supply voltage for the liquid crystal device;

Figure 24 is a chromaticity diagram indicating a black color at the turned on state of the supply voltage for the liquid crystal device;

Figures 25A and 25B are views for explaining a problem which occurs when cutting the upper polarization board and the twisted phase difference board in a conventional art, and Figures 25C and 25D are views for explaining cutting these boards according to the present invention;

Figure 26 is an explanatory view for explaining cutting of the upper polarization board and the twisted phase difference board in an actual manufacturing method of the liquid crystal display apparatus according to the present invention;

Figure 27 is an essential structural view in which a

reflection board is added to the liquid crystal display apparatus shown in Fig. 1;

Figure 28 is an essential structural view in which a touch panel is added to the liquid crystal display apparatus shown in Fig. 1;

Figure 29 is a graph for explaining the temperature characteristic of the temperature compensating type liquid crystal polymer layer and the retardation of the nematic liquid crystal layer; and

Figure 30 is a graph for explaining the contrast in use of the liquid crystal polymer layer having the temperature compensation.

BEST MODE FOR CARRYING OUT THE PRESENT INVENTION

The preferred embodiments of the present invention will be explained with reference to the drawings below.

Figure 1 is an essential structural view of the liquid crystal display apparatus according to the present invention. In the drawing, reference number 1 denotes a first polarization board, 2 is a liquid crystal device, 3 is a twisted phase difference board, and 4 is a second polarization board. The liquid crystal device 2 is structured by holding the liquid crystal layer 24, and by the first substrate 21b and the second substrate 21a, the first transparent electrode 22b and the second transparent electrode 22a, and the first alignment film (lower) 23b and the second alignment film (upper) 23a. Further, the twisted phase difference board 3 is structured by coating the liquid crystal polymer on the transparent film substrate 31b, performing alignment process at high temperature so as to obtain a desirable twisted angle, rapidly cooling and fixing it, and coating the hardcoat layer 31a.

In this example, the twisted phase difference board 3 is provided between the liquid crystal device 2 and the second polarization board 4, and the following is explained with respect to this arrangement. However, since the same effect can be obtained if the twisted

phase difference board 3 is provided between the liquid crystal device 2 and the first polarization board 1, the explanation is omitted.

Further, the twisted phase difference board 3 has a characteristic which can adjust freely and independently the retardation for the direction of the thickness. The present invention defines the above-mentioned optimum relationship of the angle based on various experiments explained below by utilizing the above-mentioned characteristics. As the twisted phase difference board 3, a model "LC film" which was provided by NIPPON PETROLEUM & CHEMICAL CO., LTD. and is available in the market, was used.

Figure 2 shows data of various angles when performing experiments 1 to 7 by changing various conditions, i.e., the relationship of the arranged angles, using the twisted phase difference board 3 used in the present invention. In this experiment, a horizontal axis (an x-axis) at the direction of the hands showing just three o'clock is defined as 0° , the angle for anticlockwise is defined as "plus", and the angle for clockwise is defined as "minus". The following Figs. 4 to 10 show the data when changing the retardation and wavelength in accordance with the above angle conditions.

Further, Figure 3 shows data of the relationship of the arranged angles when a desirable display image was finally obtained based on the data shown in Figs. 4 to 10. In Fig. 3, the best quality of the display image can be obtained in the relationship of the angle shown by "FINAL", and it is possible to realize low cost apparatus.

In Figs. 2 and 3, the "upper (second) polarization board" corresponds to the second polarization board 4 in Fig. 4; the "twisted phase difference board" corresponds to the twisted phase difference board 3 in Fig. 3; the "upper polymer molecule" corresponds to the upper polymer 32a in Fig. 1; the "lower polymer molecule"

corresponds to the lower polymer 32b in Fig. 1; the "liquid crystal cell" corresponds to the liquid crystal device 2 in Fig. 1; the "upper liquid crystal molecule" corresponds to the liquid crystal molecule in the second alignment film 23a in Fig. 1; the "lower liquid crystal molecule" corresponds to the liquid crystal molecule in the first alignment 23b in Fig. 1; and the "lower (first) polarization board" corresponds to the absorption axis of the first polarization board 1 in Fig. 1.

The data of the experiment numbers 1 to 7 in Fig. 2 are shown in the graphs shown in Figs. 4 to 10. That is, the experiment number 1 corresponds to Fig. 4; the experiment number 2 corresponds to Fig. 5; the experiment number 3 corresponds to Fig. 6; the experiment number 4 corresponds to Fig. 7; the experiment number 5 corresponds to Fig. 8; the experiment number 6 corresponds to Fig. 9; and the experiment number 7 corresponds to Fig. 10. Further, Figure 11 shows data of the phase difference board used in the prior art, and is provided for comparing the effect of the present invention with that of the prior art.

In the following explanations, a twist angle 240° is used for all liquid crystal cells, and the retardation $\Delta n d_1$ is $0.84 \mu\text{m}$. UP is the angle of the absorption axis of the upper (second) polarization board, LP is the angle of the absorption axis of the lower (first) polarization board, and LCP is the liquid crystal polymer.

When the STN is used as the liquid crystal device, it is preferable to use the twist angle in the range of 180° to 270° . This is because, when the twist angle exceeds 270° , an increase in failures of the alignment and deterioration of the response characteristic are confirmed experimentally, and deterioration of the slope of the characteristic are also confirmed experimentally at the angle 180° or less. Although the twist angle 240° was used in this embodiment according to the present invention, if the twist angle lies in the range of 180°

to 270° , it is confirmed that the present invention can be applied to the liquid crystal.

In Fig. 4, the ordinate is transmission factor, and the abscissa is retardation $\Delta n d_2$ of the liquid crystal polymer layer (twisted phase difference board), and this graph shows the relationship between the transmission factor and the retardation $\Delta n d$ in the case of the UP being in the range of $+35^\circ$ to $+75^\circ$ and the LP being -15° (fixed). In this case, for other angles, the upper polymer molecule is -70° , and the lower polymer molecule is $+70^\circ$ as shown by the experiment number 1 in Fig. 2.

As shown in the drawing, when the UP is $+75^\circ$, and when the retardation $\Delta n d_2$ is $0.45 \mu\text{m}$, the maximum brightness is 0.248.

As mentioned above, when the UP is $+75^\circ$, and when the retardation $\Delta n d_2$ is $0.45 \mu\text{m}$, the maximum brightness 0.248 was obtained. However, the white color which is very close to the blue color is found in the spectral characteristic of the above data, and this was undesirable visually.

In Fig. 5, as well as Fig. 4, the ordinate is transmission factor, and the abscissa is retardation $\Delta n d_2$ of the liquid crystal polymer layer, and this graph shows the relationship between the transmission factor and the retardation $\Delta n d$ in the case of the UP being in the range of $+35^\circ$ to $+75^\circ$ and the LP being -15° (fixed). In this case, for other angles, the upper polymer molecule is -80° , and the lower polymer molecule is $+60^\circ$ as shown by the experiment number 2 in Fig. 2.

As shown in the drawing, when the UP is $+45^\circ$ and $+55^\circ$, and when $\Delta n d$ is about $0.55 \mu\text{m}$, the maximum brightness (0.258) is obtained.

As explained above, although the brightness becomes maximum when the UP is $+45^\circ$ (55°) and when $\Delta n d$ is about $0.55 \mu\text{m}$, these values are insufficient visually to obtain

the desirable image.

In Fig. 6, an ordinate is transmission factor, and an abscissa is wavelength of the light, and this graph shows the spectral characteristic of the white color when the UP is in the range of $+35^\circ$ to $+75^\circ$ and the LP being -15° (fixed), and the retardation $\Delta n d$ being $0.6 \mu\text{m}$. In this case, the upper polymer molecule is -80° , and the lower polymer molecule is $+60^\circ$. As shown in the drawing, when the UP is $+35^\circ$, a high transmission factor is obtained in long wavelength of about 600 nm or more. When the UP is $+75^\circ$, the maximum transmission factor is obtained in the wavelength of about 500 nm. Further, the transmission factor is decreased in the wavelength of about 500 nm or more. As explained above, the spectral characteristic of the white color (tint) fluctuates widely. However, when the UP is $+45^\circ$ (dotted line), the constant and high transmission factor can be obtained in the wavelength of about 500 nm or more. That is, it is possible to obtain the white color having stable characteristic.

In Fig. 7, the ordinate is transmission factor, and the abscissa is supply voltage, and this graph shows the relationship between the transmission factor and the supply voltage in the case of the UP being in the range of $+35^\circ$ to $+75^\circ$ and the LP being -15° (fixed), and the retardation $\Delta n d$ of the liquid crystal device is $0.6 \mu\text{m}$. In this case, the upper polymer molecule is -80° , and the lower polymer molecule is $+60^\circ$. As shown in the drawing, when the supply voltage is about 2v (within the range from 2v to a point P), and when the UP is $+55^\circ$, leakage of the light becomes less when the liquid crystal device is turned on, and the contrast (a ratio of the transmission factors of the black and white) becomes good. The UP (an upper polarization board) is set to $+50^\circ$ after visually taking account the white color.

In Fig. 8, the ordinate is transmission factor, and

the abscissa is supply voltage, and this graph shows the relationship between the transmission factor and the supply voltage when the UP is $+50^\circ$ (fixed), the LP is in the range of -5° to -25° , and the retardation $\Delta n d_1$ of the liquid crystal device is $0.6 \mu\text{m}$. In this case, the upper polymer molecule is -80° , and the lower polymer molecule is $+60^\circ$. As shown in the drawing, when the LP is small, the white color becomes bright, but a black color is hard to obtain. Accordingly, when the LP is about -10° , a good result can be obtained.

In Fig. 9, the ordinate is transmission factor, and the abscissa is a wavelength of light, and this graph shows the relationship between the transmission factor and the wavelength when the UP is $+50^\circ$ (fixed), the LP is -10° (fixed), and the retardation $\Delta n d_1$ of the liquid crystal device is $0.6 \mu\text{m}$. The supply voltage is used as a parameter. In this case, the upper polymer molecule is -80° , and the lower polymer molecule is $+60^\circ$.

As shown in the drawing, when the supply voltage is changed in the range of 0v to 2.2v, the spectral characteristic becomes normal white at 0 volt, and is also normal at the halftone in the range of 2.0v to 2.05v. Further, the spectral characteristic becomes black with a slightly blue color (this is because the transmission factor does not reach 0v, as shown by arrows).

In Fig. 10, the ordinate is transmission factor, and the abscissa is a wavelength of light. This graph shows the relationship between the transmission factor and the wavelength in the case that the twist angle of the twisted phase difference board is $+200^\circ$ (in the above mentioned case, this angle is $+220^\circ$). Further, this graph shows the relationship when the UP is $+40^\circ$ (fixed), the LP is -15° (fixed), and the retardation $\Delta n d_1$ of the liquid crystal device is $0.6 \mu\text{m}$. The supply voltage is

used as a parameter. In this case, the upper polymer molecule is -100° , and the lower polymer molecule is $+60^\circ$.

As shown in the drawing, when the supply voltage is changed in the range of 0v to 2.2v, the spectral characteristic becomes the normal white at 0 volt, and the desirable black can be obtained in the range of 2.1v to 2.2v (this is because the transmission factor reaches perfectly 0 when the wavelength is about 500 nm).

In Fig. 11, the ordinate is transmission factor, and the abscissa is a wavelength of light. This graph shows the relationship between the transmission factor and the wavelength when the supply voltage is used as the parameter in the liquid crystal display apparatus using the phase difference board of a conventional uniaxial oriented film. This is a product specification of the phase difference board made of a uniaxial oriented polycarbonate film which is used in the conventional product by the applicant. In this example, however, since the white color (when the supply voltage is 0v) becomes light blue, the halftone becomes light brown and the black color is changed to blue from brown, it is necessary to improve the conventional phase difference board (as shown by arrows, the transmission factor does not reach 0, and a color close to black remains).

Figures 12 to 18 are explanatory views for schematically explaining arrangement relationships (angles) shown in Figs. 4 to 10. That is, Figure 12 corresponds to the experiment 1 of Fig. 2, Figure 13 corresponds to the experiment 2 of Fig. 2, Figure 14 corresponds to the experiment 3 of Fig. 2, Figure 15 corresponds to the experiment 4 of Fig. 2, Figure 16 corresponds to the experiment 5 of Fig. 2, Figure 17 corresponds to the experiment 6 of Fig. 2 and Figure 18 corresponds to the experiment 7 of Fig. 2.

Further, Figures 19 to 21 correspond to Fig. 3. That is, Figure 19 corresponds to "FINAL 1", Figure 20

corresponds to "FINAL 2", and Figure 21 corresponds to "FINAL 3".

Still further, in Figs. 12 to 21, the "lower polarization board" corresponds to the first polarization board 1 of Fig. 1, the "liquid crystal cell" corresponds to the liquid crystal device 2 of Fig. 1 and the "phase difference board" corresponds to the twisted phase difference board 3 of Fig. 1, and the "upper polarization board" corresponds to the second polarization board 4 of Fig. 1.

In this example, as shown in the drawing, the twist angle between the upper liquid crystal molecule 23a and the lower liquid crystal molecule 23b was set to 240° as mentioned above. Further, the twist angle between the upper polymer molecule 32a and the lower polymer molecule 32b of the phase difference board was set to either 220° or 200° .

As mentioned above, the "FINAL 3" is the best in viewpoints of display quality and cost performance.

Figure 22 is a view for explaining an evaluation of image quality of the liquid crystal display apparatus using the 220° -twisted phase difference board and the 200° -twisted phase difference board which were prepared based on the angle relationship of "FINAL 1" to "FINAL 3" shown in Fig. 3. Figure 23 is a chromaticity diagram which shows the white color when the supply voltage to the liquid crystal device is turned off. Figure 24 is a chromaticity diagram which shows the black color when the supply voltage to the liquid crystal device is turned on.

In Fig. 22, each of values x and y is the value on the chromaticity diagram shown in Figs. 23 and 24. As shown in the drawing, when the 220° -twisted phase difference board is used, it is possible to improve not only white color (value Y), but also the halftone. According to the evaluation based on the viewpoint of an observer, the characteristic of the view angle can be improved, and the image quality becomes very good.

Further, when the 200° -twisted phase difference board is used, the contrast can be improved. Accordingly, the twist angle of the phase difference board is preferable in the range of 200° to 230° . That is, when the twist angle of the phase difference board is set to the angle smaller than that of the liquid crystal device (for example, 240°) in the range of 10° to 40° , the contrast can be improved. On the other hand, when the twist angle of the phase difference board becomes smaller, the contrast becomes worse and it is not preferable.

Figure 23 is a chromaticity diagram explaining the relationship between the retardation $\Delta n d_1$ of the liquid crystal layer and the white color when the supply voltage to the liquid crystal layer is turned off. In the drawing, 755 and 770 are values of the retardation $\Delta n d_1$, and are shown by $0.755 \mu\text{m}$ and $0.770 \mu\text{m}$. As shown in the diagram, 755 is positioned on the dark yellow-green in the diagram. 770 is positioned on the light yellow-green in the diagram. 800 and 840 are positioned on the green-yellow close to the white in the diagram. 900 and 1000 are positioned on the yellow-white in the diagram.

Figure 24 is a chromaticity diagram explaining the relationship between the retardation $\Delta n d_1$ of the liquid crystal layer and the black color when the supply voltage to the liquid crystal layer is turned on. As well as the above, in the diagram, 770 and 800 are values of the retardation $\Delta n d_1$, and are shown by $0.770 \mu\text{m}$ and $0.800 \mu\text{m}$. 770 and 800 are positioned on the intermediate of the blue. 900 is positioned on green-blue close to white in the diagram. 1000 is positioned on blue-green close to white in the diagram. Accordingly, although the black having the retardation $\Delta n d_1$ of 770 to $990 \mu\text{m}$ is colored slightly blue, a good black can be obtained on the display. However, when the retardation $\Delta n d_1$ is larger than 900 nm , the black is close to green and it is not

preferable. Further, as explained in Figs. 4 and 5, the difference between Δn_1 and Δn_2 , i.e., $\Delta n_1 - \Delta n_2$, is preferable in the range of 0.1 to 0.3 μm , in particular, 0.2 to 0.3 μm .

5 Next, a manufacturing method of the liquid crystal display apparatus according to the present invention is explained with reference to the drawings. Figures 25A and 25B are views for explaining problems in material-cutting in the conventional art when cutting the upper
10 polarization board (formed by a rolled film) and the twisted phase difference board (also structured by a rolled film). Figures 25C and 25D are views for explaining material-cutting according to the present invention.

15 As explained in detail below, in the conventional art, there was considerable loss in material-cutting when superposing the twisted phase difference board on the upper polarization board. That is, since there is the relationship between the molecule-oriented direction of
20 the upper polymer and the direction of the absorption axis of the upper polarization board in the liquid crystal polymer layer of the twisted phase difference board, the above two rolled films cannot be directly superposed upon each other as they stand, in the same
25 rolling direction (i.e., roll-out direction) of the twisted phase difference board and the upper polarization board, so that there were considerable loss in material-cutting. Accordingly, this results in increase of parts cost of the liquid crystal display apparatus. In the
30 present invention, it is possible to adhere and wind the twisted phase difference board and the upper polarization board for the same roll-out direction without loss at the material-cutting of the twisted phase difference board so that it is possible to reduce the cost of the liquid
35 crystal display apparatus. The present invention is explained in detail below.

Figure 25A shows arrangement relationship between the upper polarization board 4 and the upper polymer 32a shown in Fig. 18. That is, the arrow "a" is the direction of the absorption axis (i.e., a moving direction of the rolled film) of the upper polarization board, and the direction of the arrow "a" has $+40^\circ$ for the x-axis. On the other hand, the arrow "b" the direction of the molecule orientation (i.e., the moving direction of the rolled film), and the direction of the arrow "b" has -100° for the x-axis.

Accordingly, as mentioned above, since the upper polarization board of the rolled film and the twisted phase difference board of the rolled film have the angle relationship between the absorption axis and the oriented direction, they cannot be superposed on each other in the same direction (i.e., roll-out direction). In this case, the upper polymer must be inclined by 140° for the rolled film of the upper polarization board in order to superpose on each other as shown by Fig. 25B. Accordingly, when manufacturing an individual display apparatus, there is considerable loss in the material-cutting when superposing and cutting.

Further, Figure 25B is a detailed explanatory view of Fig. 25A. The arrangement relationship between the upper polarization board 4 and the upper polymer 32a is the same as that of Fig. 25A. As well as Fig. 25A, the arrow "a" is $+40^\circ$ for the x-axis of the twisted phase difference board, and the arrow "b" is -100° for the x-axis. In this case, as shown by the angles a_1 and a_2 , the upper polymer must be produced based on the oriented direction of $+40^\circ$ for the moving direction "b" of the rolled film in the manufacture of the twisted phase difference board itself. Accordingly, when the angle relationship between the upper polarization board and the upper polymer is 140° , they must be inclined and superposed on each other as shown in Fig. 25B so that there is considerable loss in material-cutting.

In the present invention, as shown in Figs. 20 and 21, the angle difference between the absorption axis of the upper polarization board and the molecule-oriented direction of the upper polymer is set to -40° , and the oriented direction of 40° (i.e., angles a_1 and a_2) of the rolled film of the upper polymer itself is utilized positively so that it is possible to realize the same moving direction of the rolled film of the upper polarization board as that of the rolled film of the twisted phase difference board.

That is, Figure 25C shows an arrangement relationship between the upper polarization board 4 and the upper polymer 32a in Fig. 20. That is, the arrow "a" indicates the direction of the absorption of the upper polarization board, and has -45° for the x-axis. On the other hand, the arrow "b" indicates the molecule-oriented direction of the upper polymer, and has -85° for the x-axis of the twisted phase difference board. Accordingly, the angle difference between them is 40° . Therefore, when the rolled film of the upper polymer having the oriented direction of 40° is used, the rolled film of the upper polarization board and the rolled film of the upper polymer can be superposed upon each other for the same direction.

Further, Figure 25D shows an arrangement relationship between the upper polarization board 4 and the upper polymer 32a shown in Fig. 21. That is, the arrow "a" has $+90^\circ$ for the x-axis of the twisted phase difference board, and the arrow "b" has $+50^\circ$ for the x-axis of the twisted phase difference board. Accordingly, the angle difference between them is 40° . Therefore, when the rolled film of the upper polymer having the oriented direction of 40° is used, the rolled film of the upper polarization board and the rolled film of the upper polymer can be superposed upon each other in the same direction. Further, when cutting the rolled film for each size, since it is cut only at a right angles to the

rolled film, it is possible to utilize almost all rolled film without loss in material-cutting, and to realize low cost product.

Figure 26 is an explanatory view in the case of actual manufacture of the rolled films in Figs. 25C and 25D. As shown in the drawing, the rolled films of the upper polarization board and the upper polymer are moved to the same direction, superposed upon each other and adhered. Then, the superposed rolled film is cut off for each size so that the polarization board with the phase difference board can be manufactured (see dotted line (1)). As another case, the rolled films are superposed upon each other and wound, and cut off it to a suitable size in order to manufacture a bonded unit of the polarization board and the twisted phase difference board. As a result, it is possible to considerably reduce material-cutting loss, and to improve productivity, so that it is possible to achieve reduction in the manufacturing cost.

Figure 27 is an essential and structural view of the liquid crystal display apparatus in which a reflection board is added to the structure of Fig. 1. In general, aluminium is evaporated onto a thin substrate, such as a paper, an aluminium foil, etc., and this aluminium-coated substrate is used as the reflection board 5. As another example of the reflection board, a half-transmission type reflection board, in which the aluminium is coated onto a transparent substrate, is used. In this case, a back light (not shown) is usually used in addition to the reflection board.

Figure 28 is an essential and structural view of the liquid crystal display apparatus in which a touch panel is added to the structure of Fig. 1. The touch panel 6 is usually bonded to the upper polarization board 4. In the liquid crystal display apparatus according to the present invention, since a high contrast can be realized, it is very easy to observe the image without

deterioration of the image quality even if a touch panel 6 is provided.

Figure 29 is a graph for explaining a temperature compensating type liquid crystal polymer used as one modified example and a temperature characteristic of the retardation of the nematic liquid crystal layer. The twisted phase difference board, in which the retardation $\Delta n d_2$ is not changed even if the temperature is changed, was used in this embodiment. However, by using the temperature compensating type liquid crystal polymer in which the retardation $\Delta n d_2$ becomes small when the temperature raises, it is possible to provide a liquid crystal display apparatus which shows better temperature characteristic. It is obvious that the difference between the retardation $\Delta n d_1$ of the nematic liquid crystal layer and the retardation $\Delta n d_2$ of the temperature compensating type liquid crystal polymer is constant in the temperature range of 20°C to 80°C.

In order to resolve an undesirable colored image on the display apparatus and obtain the high contrast, it is desirable to have the same characteristic between two retardations $\Delta n d$ as far as possible. According to the liquid crystal polymer (LCP) used in the present invention, two retardations $\Delta n d$ are matched in this temperature range so that it is possible to realize the image having high quality. In the present invention, the difference between two retardations, i.e., $\Delta n d_1 - \Delta n d_2$, are defined in the range of 0.1 to 0.3 μm , and this range is defined when the temperature is 25°C. However, the present invention can be applied in the temperature range of 20°C to 80°C.

Figure 30 is a graph for explaining the contrast in use of the temperature compensating type liquid crystal polymer. When the temperature compensating type liquid crystal polymer and the liquid crystal cell used in the

modified example of the present invention are combined with each other, a deterioration of the contrast is not found as shown in the drawing.

POSSIBILITY OF UTILIZATION IN INDUSTRY

5 According to the present invention, as mentioned above, based on results of various experiments, the colored image on the display can be resolved by defining concretely various angle relationships, such as relationship between the twist angles, so that it is possible to provide the liquid crystal display apparatus having bright and high contrast. Further, based on the structure of the liquid crystal display apparatus mentioned above, it is possible to perform, very effectively, material-cutting of the structural parts so that it is possible to provide a manufacturing method of the liquid crystal display apparatus in which the reduction of the manufacturing cost and the improvement of the productivity can be realized. As a result, the possibility of utilization in industry is very good in various fields.

10

15

20

CLAIMS

1. A liquid crystal display apparatus comprising a first substrate (21b) having a first transparent electrode (22b) and a second substrate (21a) having a second transparent electrode (22a), liquid crystal devices (2) holding a nematic liquid crystal layer (24) which is twist-oriented by an STN-twist angle between the first and second substrates; a first polarization board (1) provided for an outside of the first substrate; a twisted phase difference board (3) provided for the outside of the second substrate and having liquid crystal polymer layers (32a, 32b); and a second polarization board (4) provided for the outside of the twisted phase difference board; characterized in that,

the direction of the twist angle of molecule orientation of the twisted phase difference board (3) is reverse to the direction of the twisted orientation of the liquid crystal molecule of the liquid crystal devices (2), and the twist angle of the twisted phase difference board is smaller than the twist angle of the liquid crystal devices (2) by 10° to 40° .

2. A liquid crystal display apparatus as claimed in claim 1, wherein the STN-twist angle lies in the range of 180° to 270° .

3. A liquid crystal display apparatus as claimed in claim 2, wherein

an angle between the liquid crystal molecule-oriented direction of the alignment film (23a) of the second substrate and the molecule-oriented direction of a lower polymer (32b) of the liquid crystal polymer layer lies in the range of 80° to 90° ;

an angle between an absorption axis of the first polarization board (1) and the liquid crystal molecule-oriented direction of the alignment film (23b) of the first substrate side lies in the range of 50° to 60° ; and

an angle between the absorption axis of

the second polarization board (4) and the molecule-oriented direction of an upper polymer (32a) of the liquid crystal polymer lies in the range of 30° to 40° .

4. A liquid crystal display apparatus as claimed
5 in claim 2, wherein

in the relationship between a retardation $\Delta n d_1$ obtained by product of a double refractive index

Δn_1 of the nematic liquid crystal layer (24) and a

thickness d_1 of the liquid crystal layer, and a

10 retardation $\Delta n d_2$ obtained by product of the double

refractive index Δn_2 of the liquid crystal polymer layer and the thickness d_2 of the liquid crystal polymer layer,

the retardation $\Delta n d_1$ lies in the range of 0.7 to $0.9 \mu\text{m}$, and

15 the difference $\Delta n d_1 - \Delta n d_2$ lies in the range of 0.1 to $0.3 \mu\text{m}$.

5. A liquid crystal display apparatus as claimed
in claim 2, wherein

an angle between the liquid crystal
20 molecule-oriented direction of the alignment film (23a) of the second substrate and the molecule-oriented direction of a lower polymer (32b) of the liquid crystal polymer layer lies in the range of 80° to 90° ;

an angle between an absorption axis of the
25 first polarization board (1) and the liquid crystal molecule-oriented direction of the alignment film (23b) of the first substrate side lies in the range of 50° to 60° ;

an angle between the absorption axis of
30 the second polarization board (4) and the molecule-oriented direction of an upper polymer (32a) of the liquid crystal polymer lies in the range of 30° to 40° ; and

in the relationship between a retardation
35 $\Delta n d_1$ obtained by product of a double refractive index

Δn_1 of the nematic liquid crystal layer (24) and a thickness d_1 of the liquid crystal layer, and a retardation Δn_2 obtained by product of the double refractive index Δn_2 of the liquid crystal polymer layer and the thickness d_2 of the liquid crystal polymer layer, the retardation Δn_1 lies in the range of 0.7 to 0.9 μm , and the difference $\Delta n_1 - \Delta n_2$ lies in the range of 0.1 to 0.3 μm .

6. A liquid crystal display apparatus as claimed in claim 2, wherein a preferential view direction of the liquid crystal devices (2) is set to any one direction of the hands of a clock showing two-thirty, four-thirty, seven-thirty or ten-thirty.

7. A liquid crystal display apparatus as claimed in claim 3 or 5, wherein the second polarization board (4) and the twisted phase difference board (3) structures a bonded unit; and the bond unit is structured by superposing upon the second polarization board of the rolled film and the twisted phase difference board of the rolled film, and adhering them for the same roll-out direction, by utilizing the angle between the absorption axis of the second polarization board (4) and the molecule-oriented direction of the upper polymer (32a) of the liquid crystal polymer layer being in the range of 30° to 40°.

8. A liquid crystal display apparatus as claimed in claim 7, wherein the bonding unit is structured by superposing upon the rolled films each other and adhering them for the same direction, and by cutting it to a predetermined size.

9. A liquid crystal display apparatus as claimed in claim 2, wherein the liquid crystal polymer layer of the twisted phase difference board has a temperature compensating characteristic in a predetermined temperature range.

10. A liquid crystal display apparatus as claimed in claim 9, wherein the liquid crystal polymer layer has a temperature compensating characteristic in which the retardation ($\Delta n d_2$) of the liquid crystal polymer layer is always smaller than the retardation ($\Delta n d_1$) of the nematic liquid crystal layer in a predetermined temperature range.

11. A liquid crystal display apparatus as claimed in claim 10, wherein the predetermined temperature range lies in the range of 20° to 80° .

12. A liquid crystal display apparatus comprising a first substrate (21b) having a first transparent electrode (22b) and a second substrate (21a) having a second transparent electrode (22a), liquid crystal devices (2) holding a nematic liquid crystal layer (24) which is twist-oriented by an STN-twist angle in the range of 180° to 270° between the first and second substrates; a first polarization board (1) provided for an outside of the first substrate; a twisted phase difference board (3) provided for the outside of the second substrate and having liquid crystal layers (32a, 32b); and a second polarization board (4) provided for the outside of the twisted phase difference board; characterized in that,

a) the direction of the twist angle of molecule orientation of the twisted phase difference board (3) is reverse to the direction of the twisted orientation of the liquid crystal molecule of the liquid crystal devices (2), and the twist angle of the twisted phase difference board is smaller than the twist angle of the liquid crystal devices (2) by 10° to 40° ;

b) an angle between the liquid crystal molecule-oriented direction of the alignment film (23a) of the second substrate and the molecule-oriented direction of a lower polymer (32b) of the liquid crystal polymer layer lies in the range of 80° to 90° ;

c) an angle between an absorption axis of the first polarization board (1) and the liquid crystal molecule-oriented direction of the alignment film (23b) of the first substrate side lies in the range of 50° to 60° ;

d) an angle between the absorption axis of the second polarization board (4) and the molecule-oriented direction of an upper polymer (32a) of the liquid crystal polymer lies in the range of 30° to 40° ;

e) in the relationship between a retardation Δn_1 obtained by product of a double refractive index Δn_1 of the nematic liquid crystal layer (24) and a thickness d_1 of the liquid crystal layer, and a retardation Δn_2 obtained by product of the double refractive index Δn_2 of the liquid crystal polymer layer and the thickness d_2 of the liquid crystal polymer layer, Δn_1 lies in the range of 0.7 to $0.9 \mu\text{m}$, and the difference $\Delta n_1 - \Delta n_2$ lies in the range of 0.1 to $0.3 \mu\text{m}$;

f) the second polarization board (4) and the twisted phase difference board (3) structure a bonded unit; and the bond unit is structured by superposing upon the second polarization board of the rolled film and the twisted phase difference board of the rolled film, adhering them for the same roll-out direction, and cutting it to a predetermined size; and

g) the liquid crystal polymer layer has a temperature compensating characteristic in which the retardation (Δn_2) of the liquid crystal polymer layer is always smaller than the retardation (Δn_1) of the nematic liquid crystal layer in a predetermined temperature range.

13. A method for manufacturing a liquid crystal display apparatus comprising a first substrate (21b)

having a first transparent electrode (22b) and a second substrate (21a) having a second transparent electrode (22a), liquid crystal devices (2) holding a nematic liquid crystal layer (24) which is twist-oriented by an STN-twist angle in the range of 180° to 270° between the first and second substrates; a first polarization board (1) provided for an outside of the first substrate; a twisted phase difference board (3) provided for the outside of the second substrate and having liquid crystal polymer layers (32a, 32b); and a second polarization board (4) provided for the outside of the twisted phase difference board; wherein an angle between an absorption axis of the second polarization board (4) and a molecule-oriented direction of an upper polymer (32a) of the liquid crystal polymer layer lies in the range of 30° to 40° ; characterized in that,

a) the second polarization board (4) is structured by rolled film;

b) the twisted phase difference board is structured by the rolled film;

c) the roll-out direction of the rolled film of the second polarization board and the roll-out direction of the rolled film of the twisted phase difference board are arranged in the same direction by utilizing an angle being in the range of 30° to 40° ;


d) the rolled film of the second polarization board and the rolled film of the twisted phase difference board are superposed upon each other and adhered them in the roll-out direction; and

e) a bonding unit is made by cutting the rolled film in a predetermined size after adhesion and bonding the second polarization board and the twisted phase difference board.

ABSTRACT

The liquid crystal display apparatus according to the present invention includes a) the direction of the twist angle of molecule orientation of the twisted phase difference board (3) is reverse to the direction of the twisted orientation of the liquid crystal molecule of the liquid crystal devices (2), and the twist angle of the twisted phase difference board is smaller than the twist angle of the liquid crystal devices (2) by 10° to 40° ; b) an angle between the liquid crystal molecule-oriented direction of the alignment film (23a) of the second substrate and the molecule-oriented direction of a lower polymer (32b) of the liquid crystal polymer layer lies in the range of 80° to 90° ; c) an angle between an absorption axis of the first polarization board (1) and the liquid crystal molecule-oriented direction of the alignment film (23b) of the first substrate side lies in the range of 50° to 60° ; d) an angle between the absorption axis of the second polarization board (4) and the molecule-oriented direction of an upper polymer (32a) of the liquid crystal polymer lies in the range of 30° to 40° ; and e) the relationship between Δn_1 of the nematic liquid crystal layer and Δn_2 of the liquid crystal polymer layer is defined in a particular relationship, so that it is possible to resolve colored image on the display and to realize an image quality having a high contrast.

Fig.1

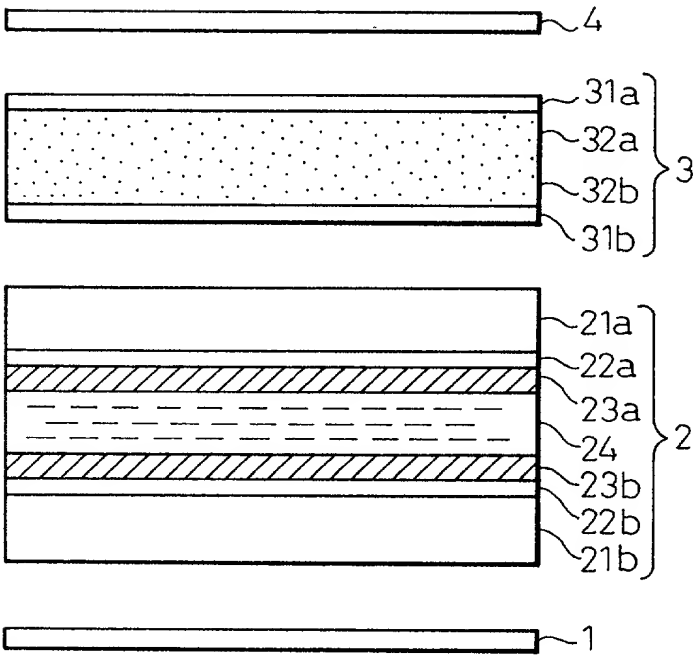

$\frac{2}{30}$

EXPERIMENT NUMBER		1	2	3	4	5	6	7
UPPER (SECOND) POLARIZATION BOARD		$+35^{\circ} \sim +75^{\circ}$	$+35^{\circ} \sim +75^{\circ}$	$+35^{\circ} \sim +75^{\circ}$	$+35^{\circ} \sim +75^{\circ}$	$+50^{\circ}$	$+50^{\circ}$	$+40^{\circ}$
	TWISTED PHASE DIFFER- ENCE BOARD	UPPER POLYMER MOLECULE	-80°	-80°	-80°	-80°	-80°	-100°
		LOWER POLYMER MOLECULE	$+70^{\circ}$	$+60^{\circ}$	$+60^{\circ}$	$+60^{\circ}$	$+60^{\circ}$	$+60^{\circ}$
	LIQUID CRYSTAL CELL	UPPER LIQUID CRYSTAL MOLECULE	-30°	-30°	-30°	-30°	-30°	-30°
LOWER LIQUID CRYSTAL MOLECULE		$+30^{\circ}$	$+30^{\circ}$	$+30^{\circ}$	$+30^{\circ}$	$+30^{\circ}$	$+30^{\circ}$	$+30^{\circ}$
LOWER (FIRST) POLARIZATION BOARD		-15°	-15°	-15°	-15°	$-5^{\circ} \sim -25^{\circ}$	-10°	-15°

Fig.3

EXPERIMENT NUMBER		FINAL 1	FINAL 2	FINAL 3
UPPER (SECOND) POLARIZATION BOARD		+45°	-45°	+90°
TWISTED PHASE DIFFER- -ENCE BOARD	UPPER POLYMER MOLECULE	-85°	-85°	+50°
	LOWER POLYMER MOLECULE	+55°	+55°	+10°
LIQUID CRYSTAL CELL	UPPER LIQUID CRYSTAL MOLECULE	-30°	-30°	-75°
	LOWER LIQUID CRYSTAL MOLECULE	+30°	+30°	-15°
LOWER (FIRST) POLARIZATION BOARD		- 5 °	+85°	+40°

Fig.4


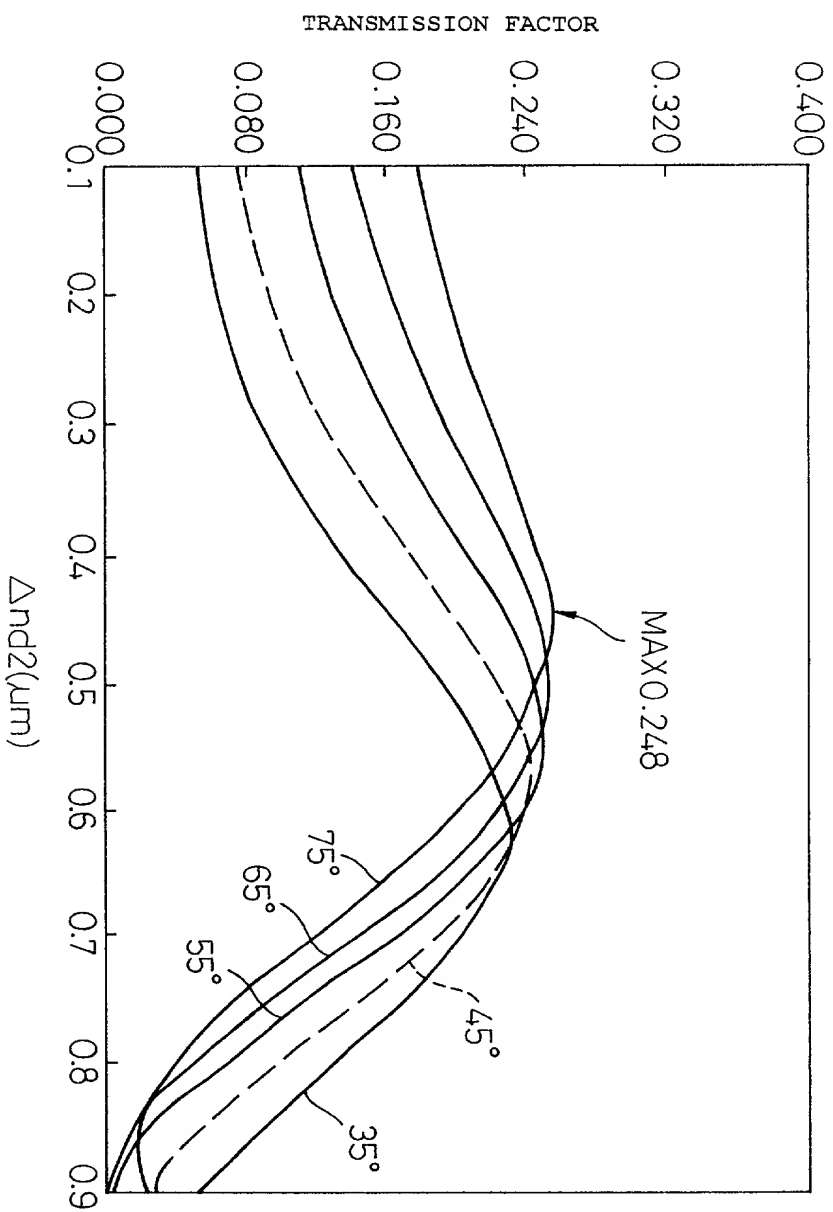


Fig.5

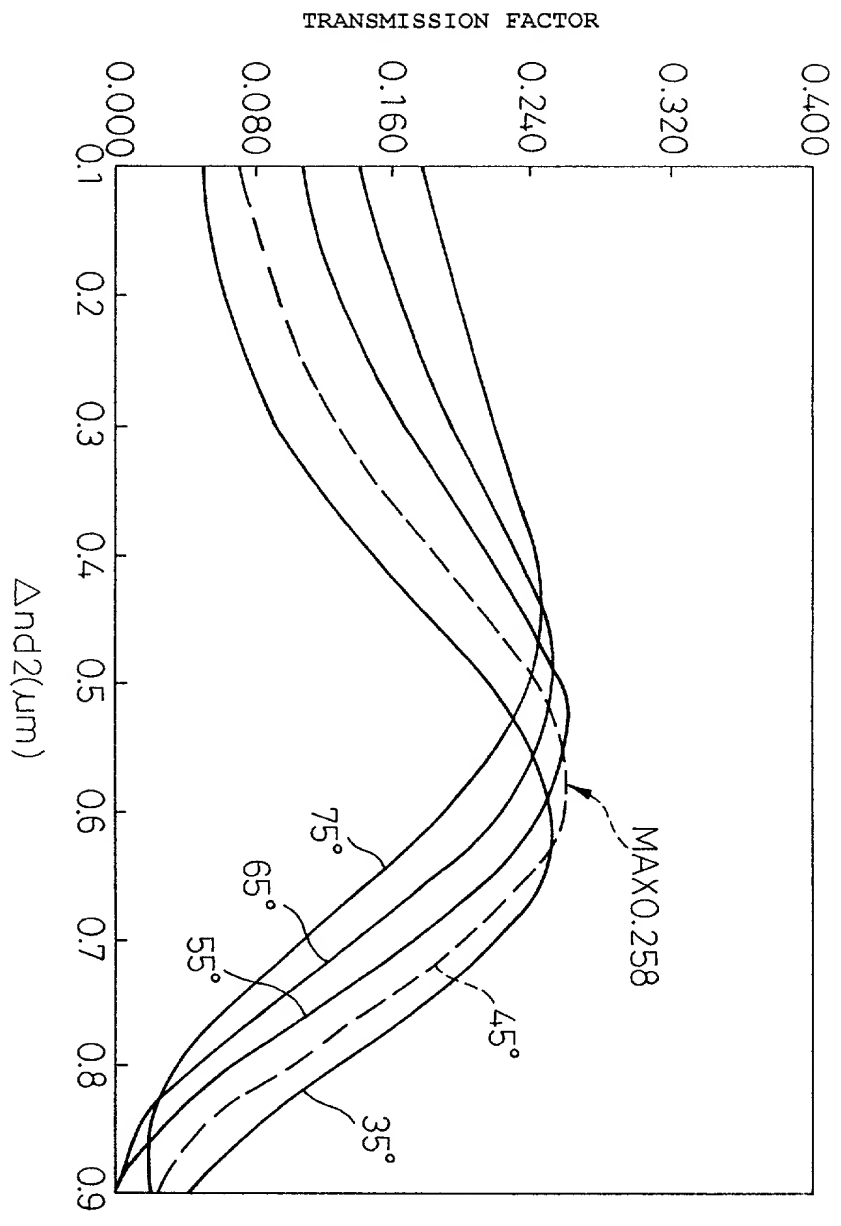

09/530008

Fig.6

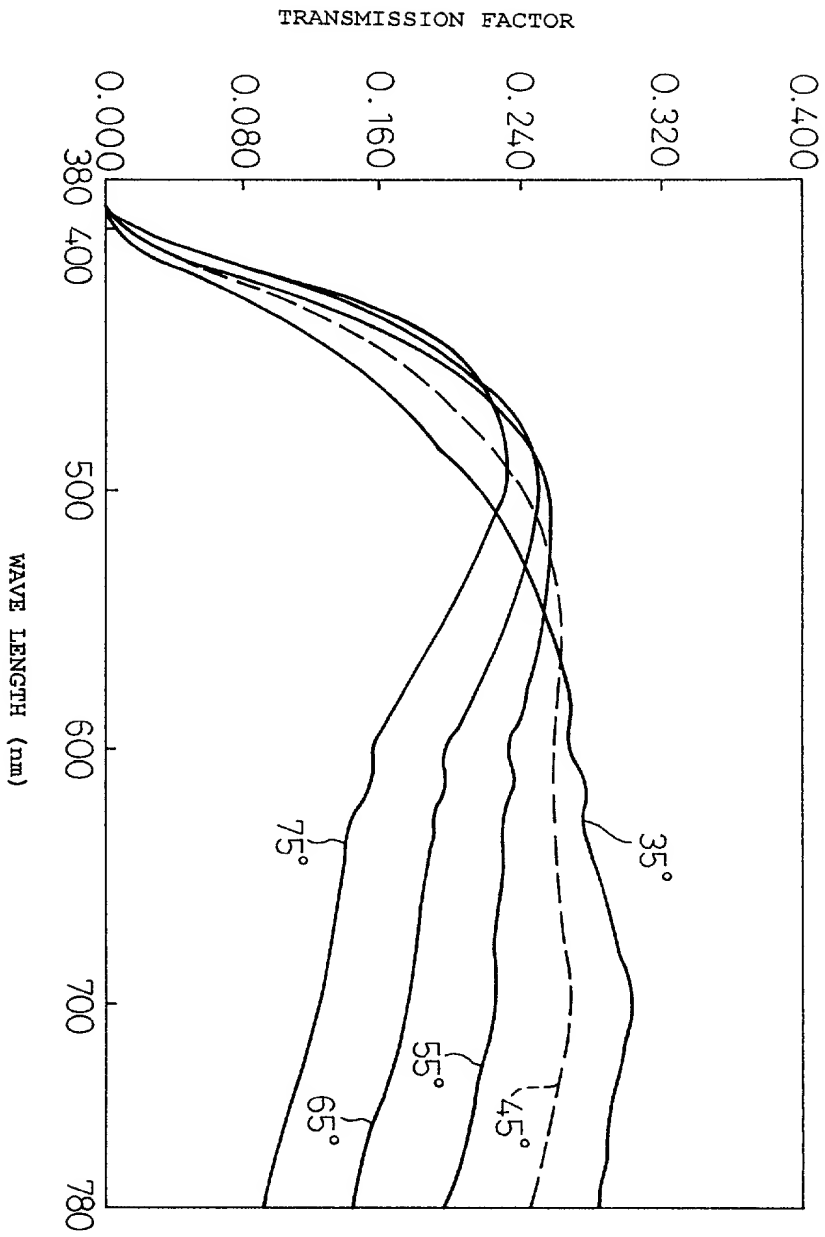


Fig. 7


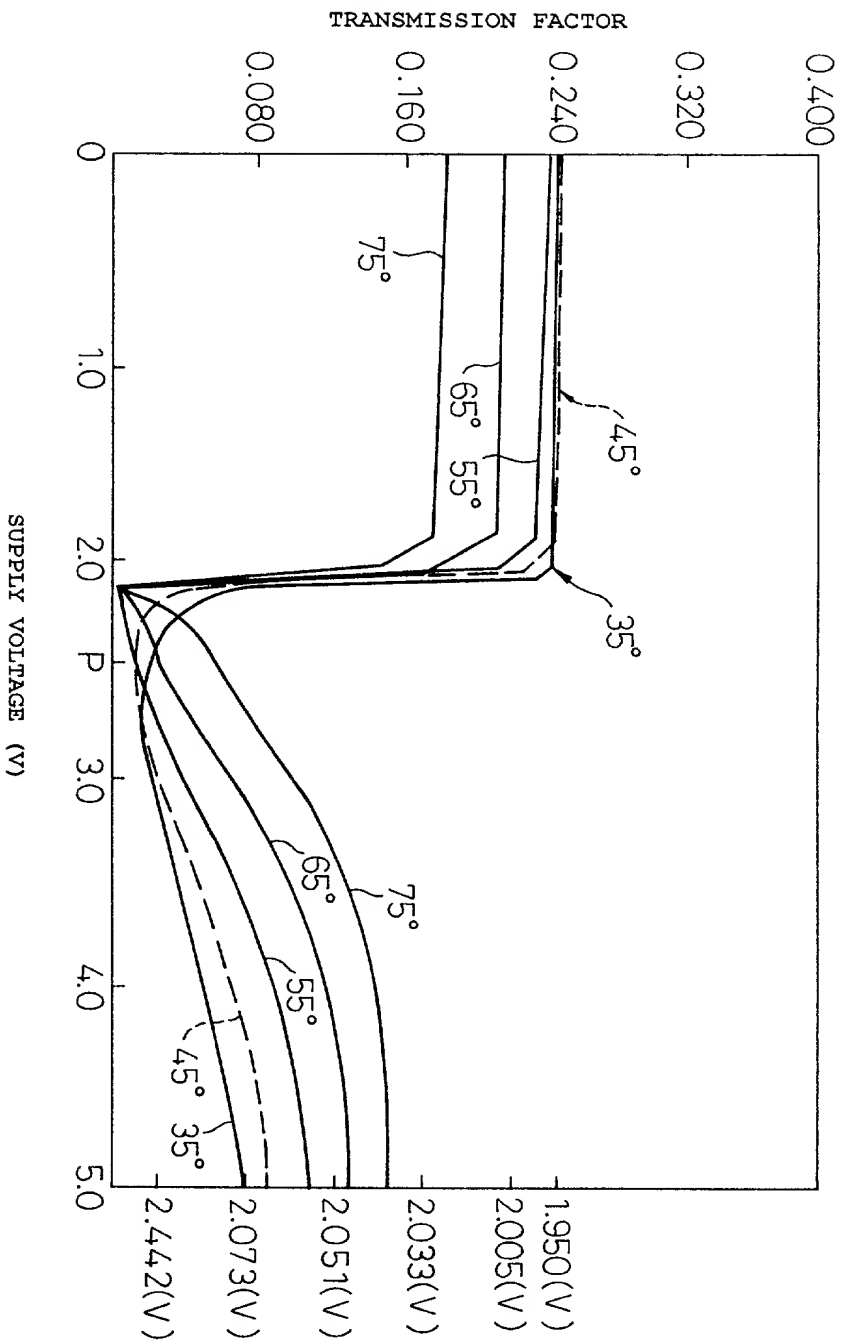


Fig. 8

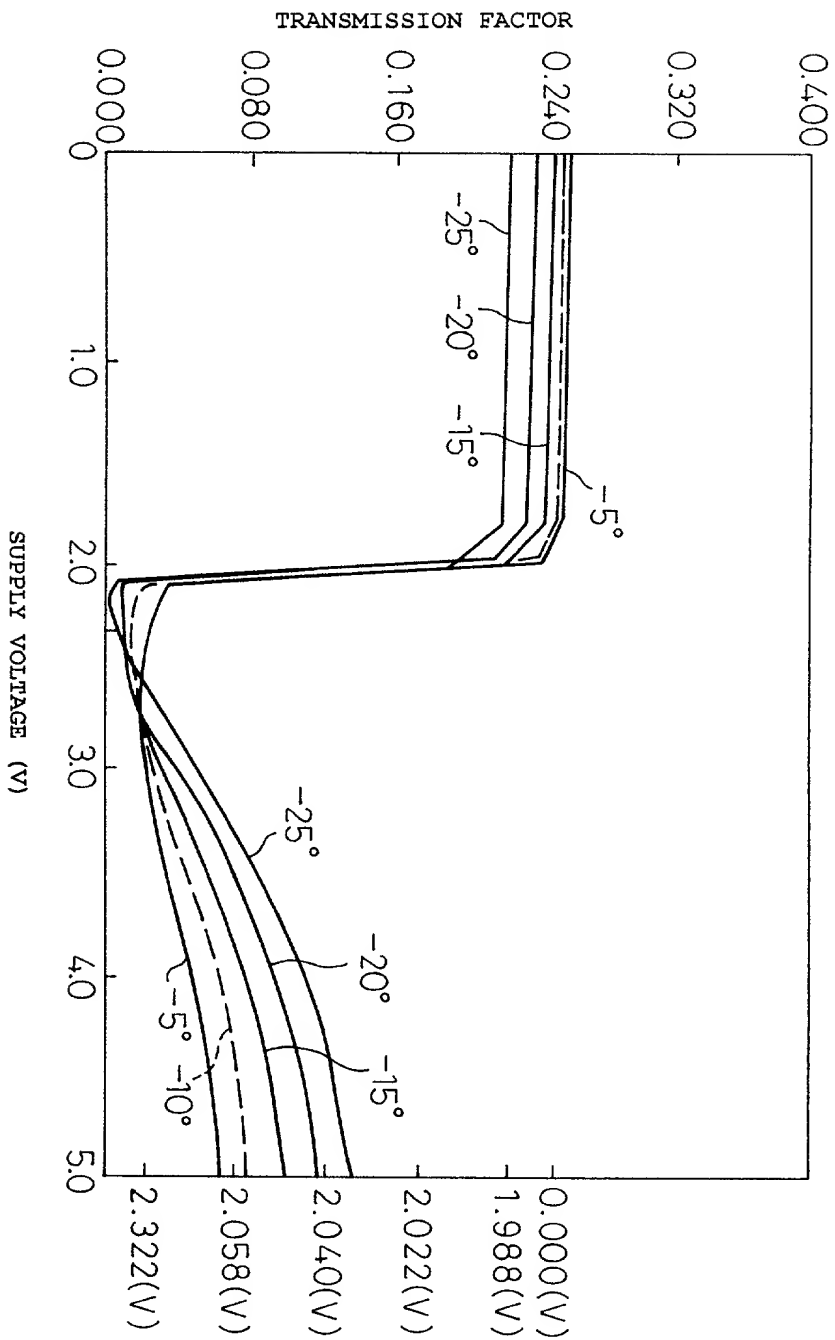

09/53008


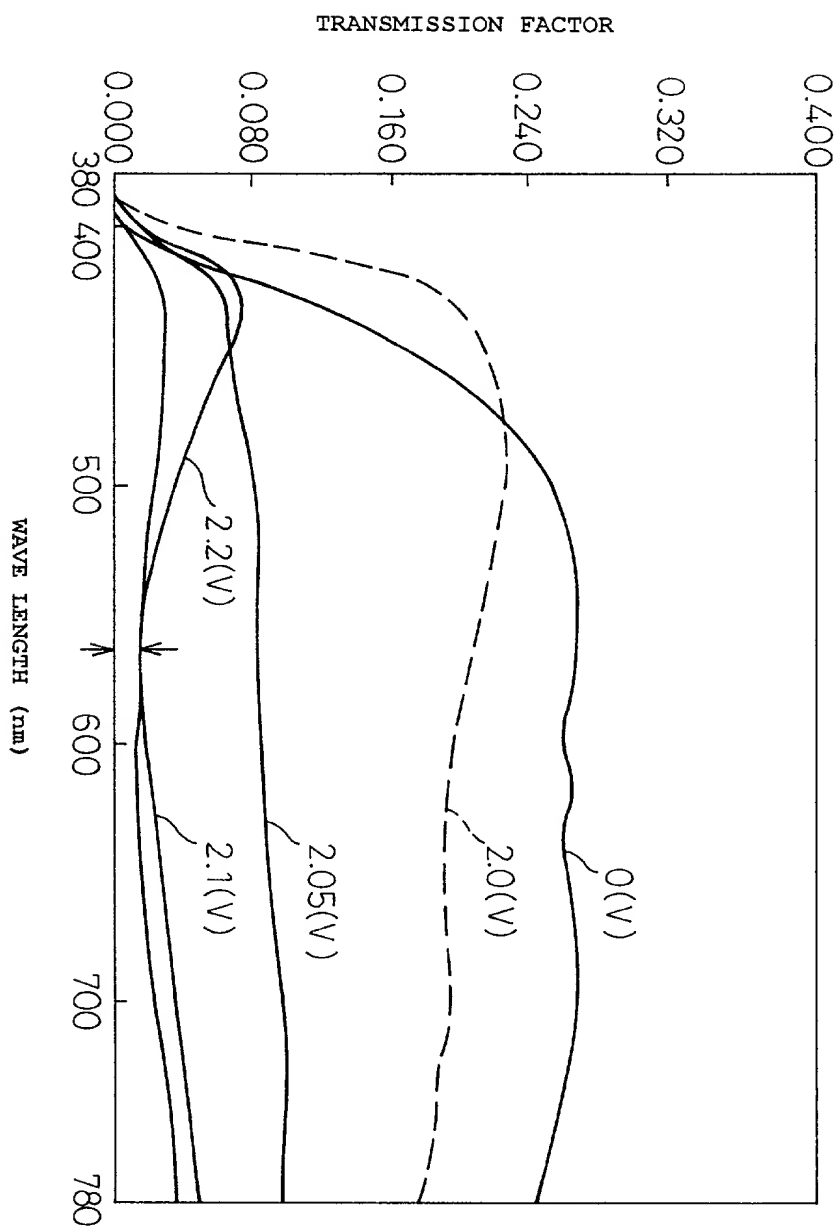


Fig.10

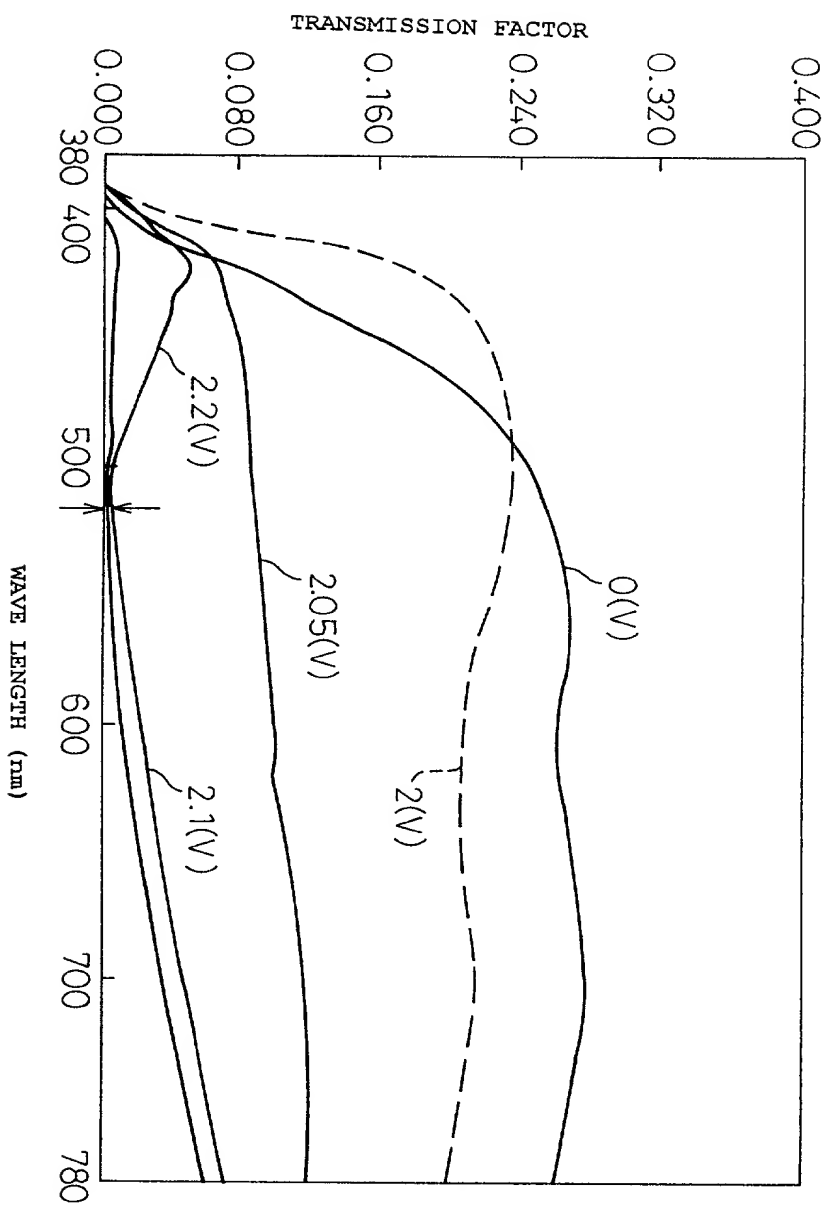

10/30

Fig.11

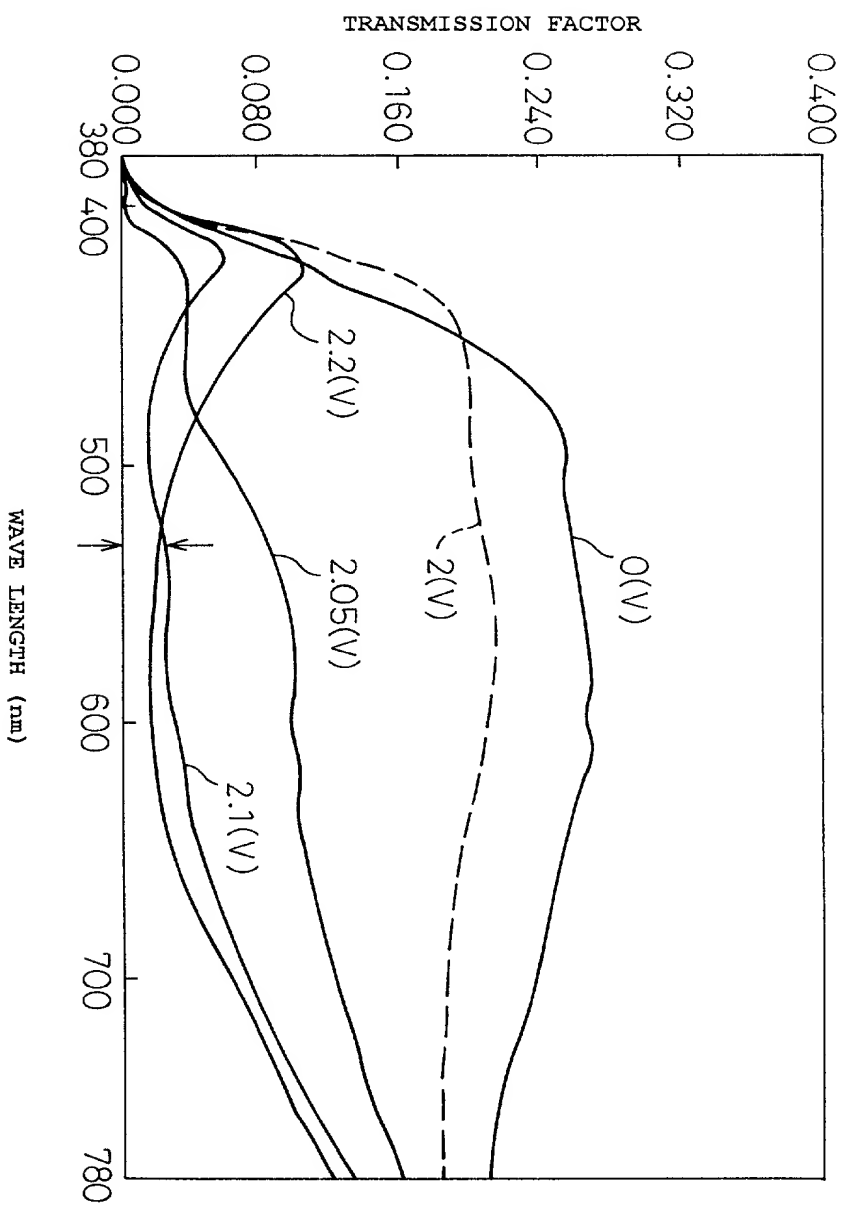


Fig.12

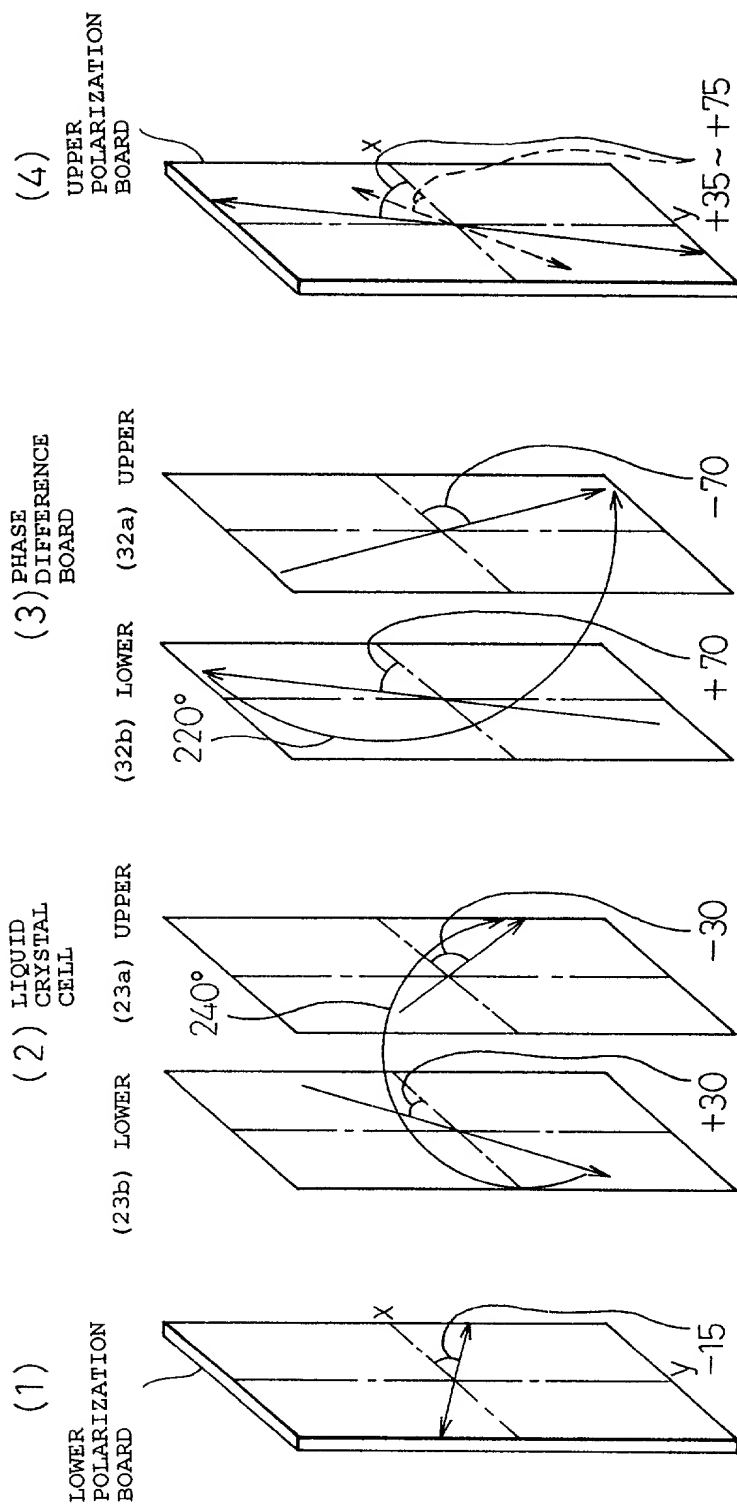


Fig.13

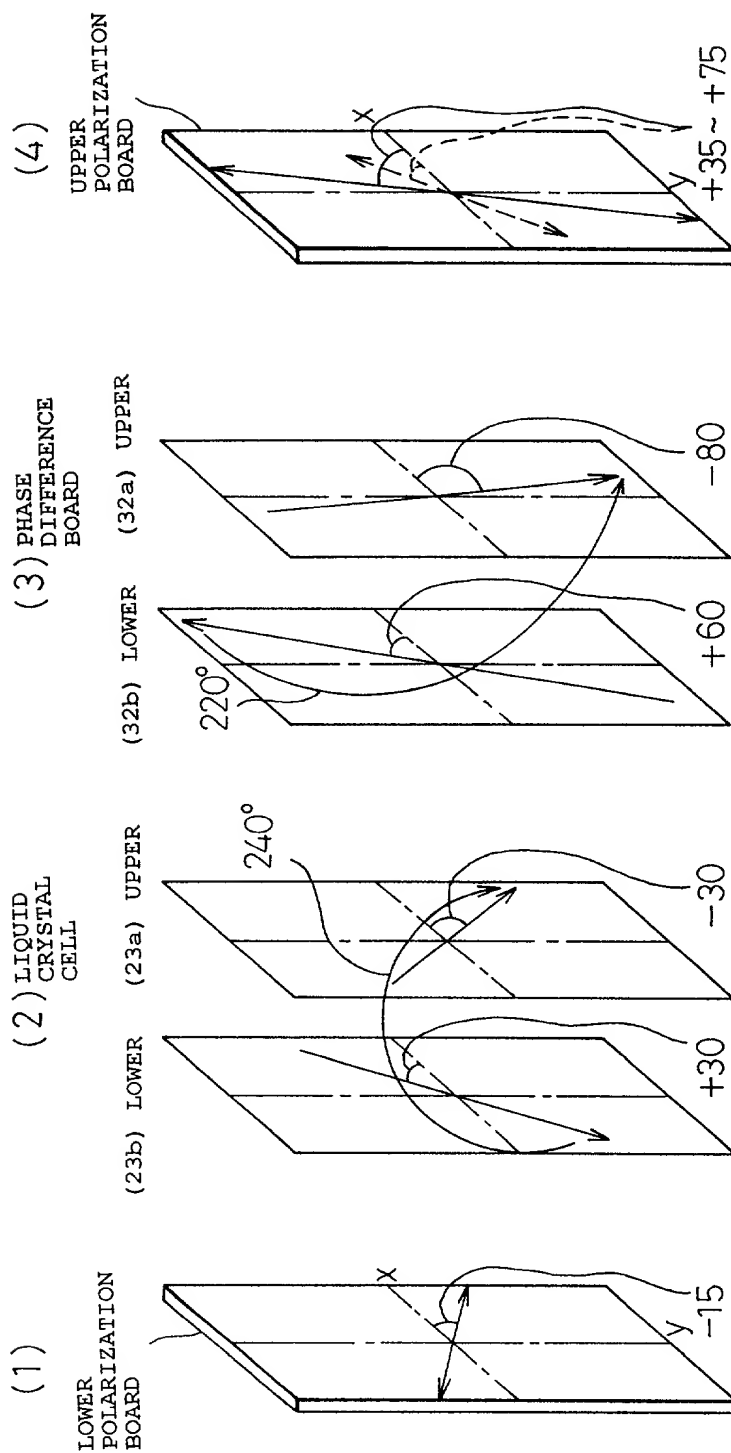


Fig.14

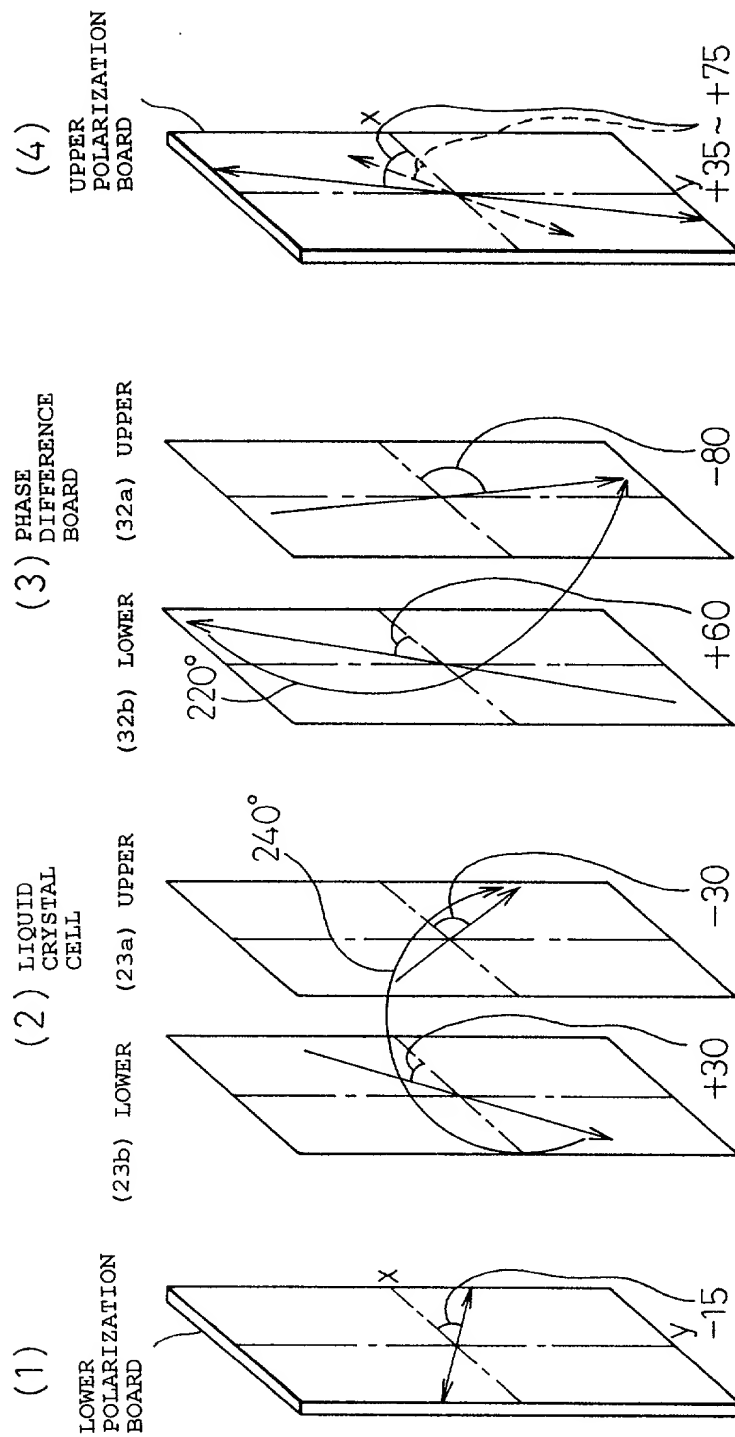


Fig.16

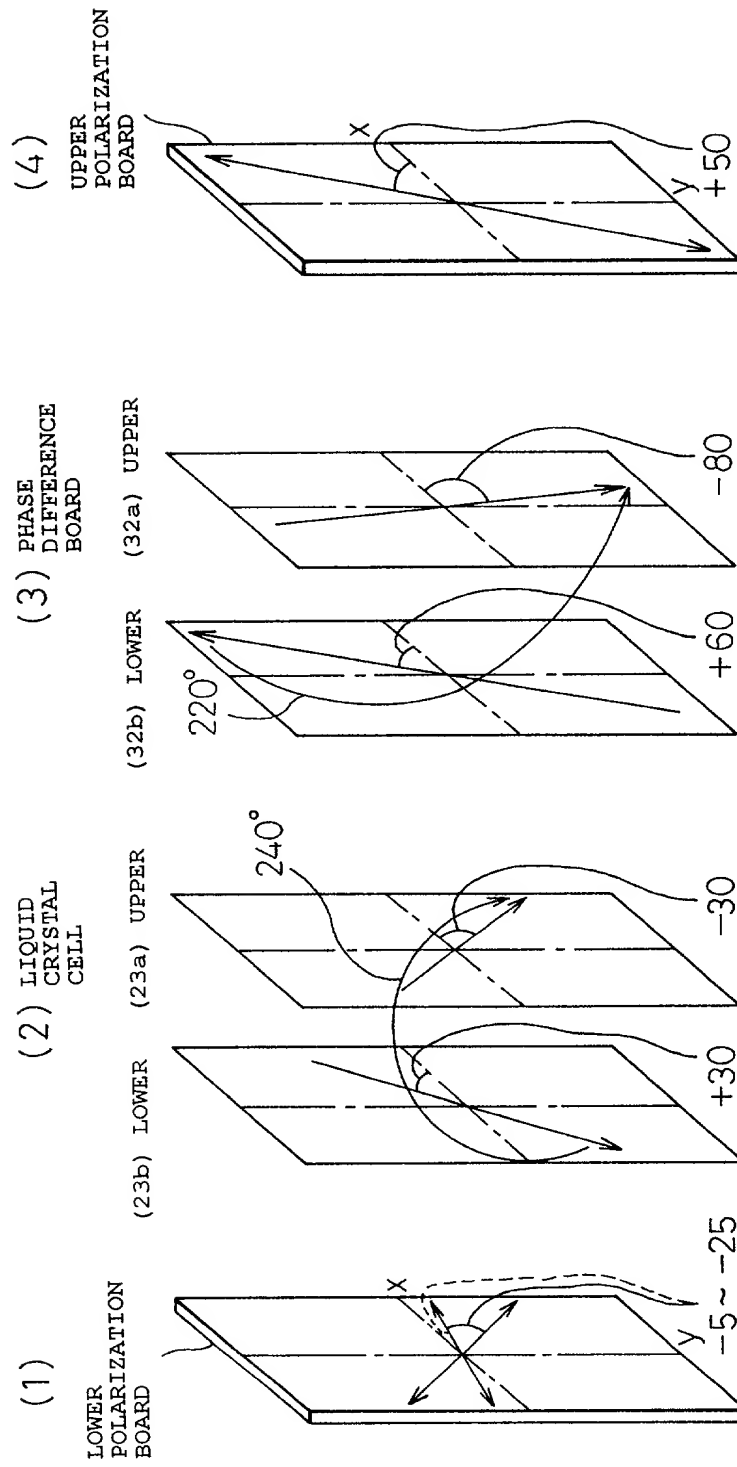


Fig.17

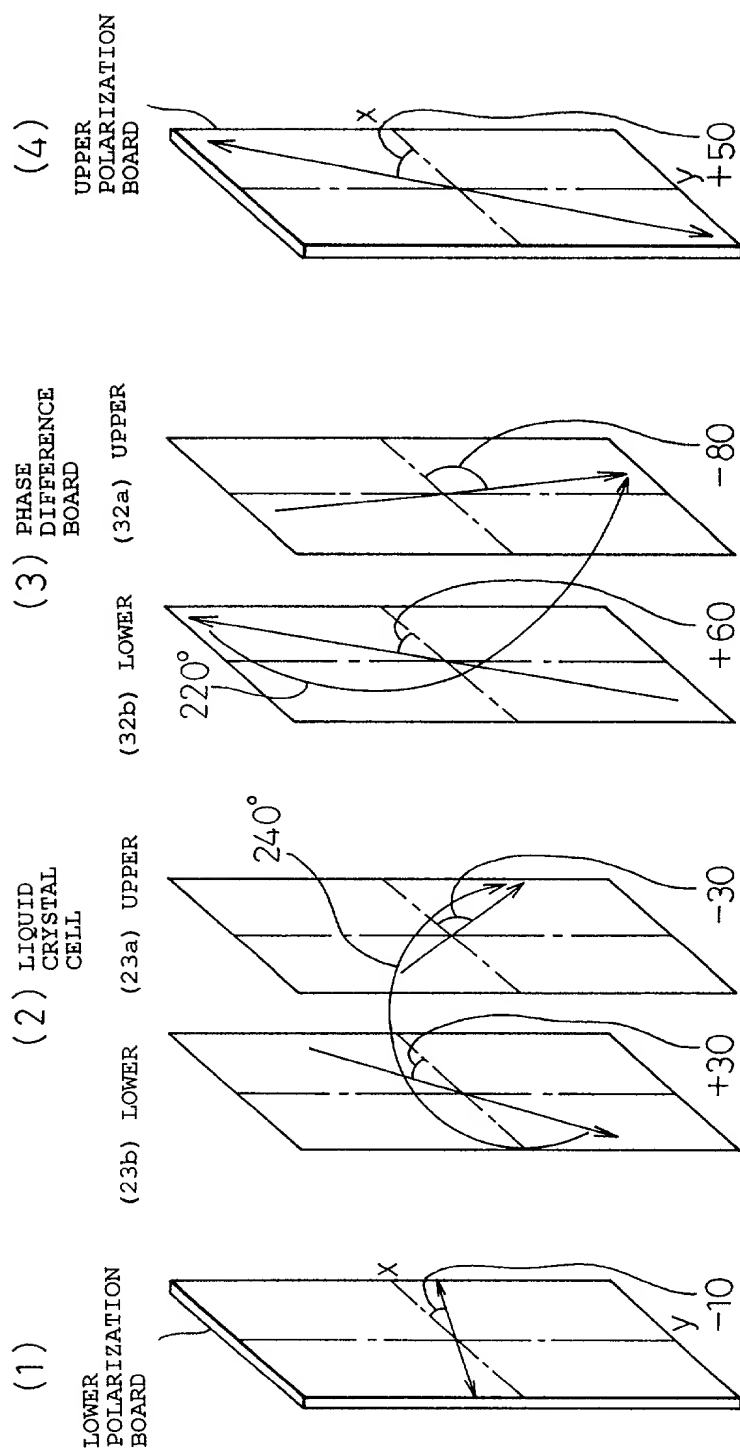


Fig.18

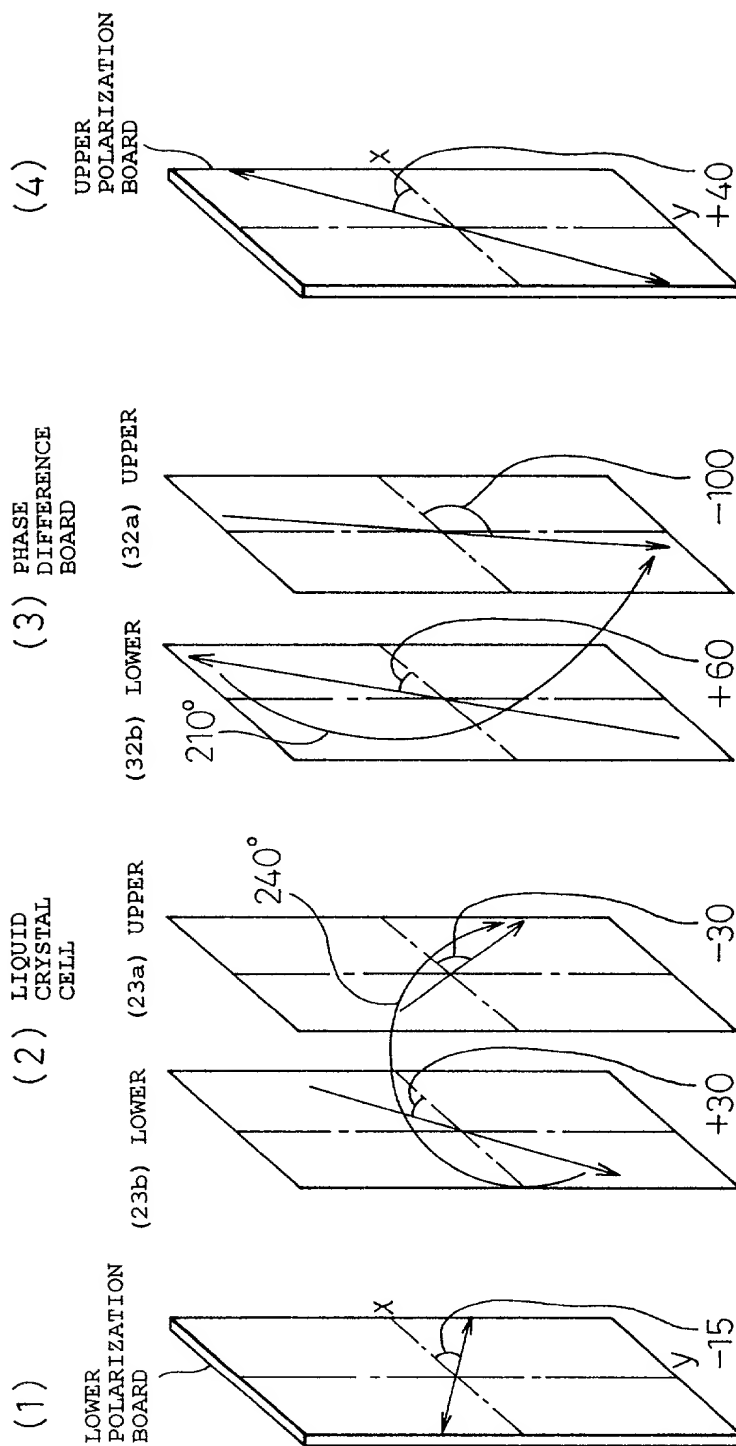


Fig.19

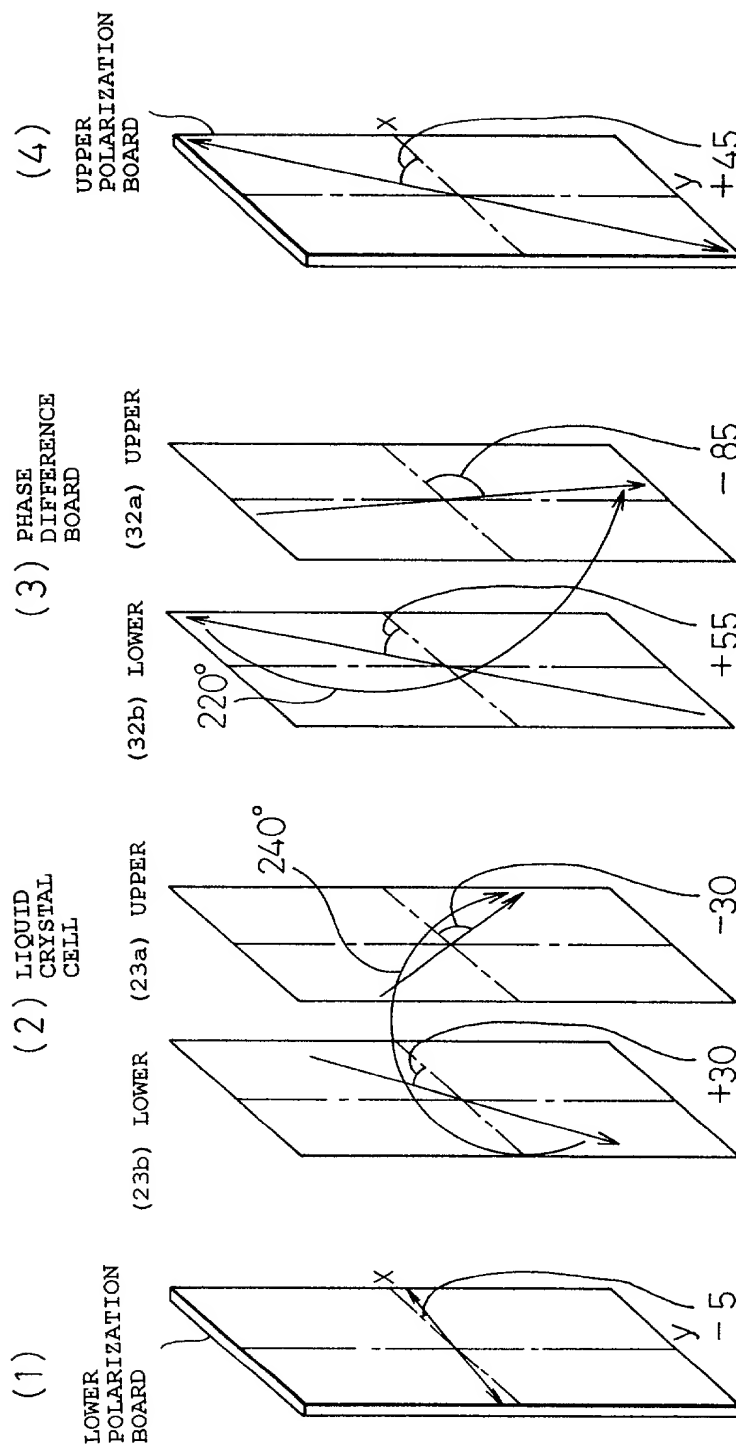


Fig. 20

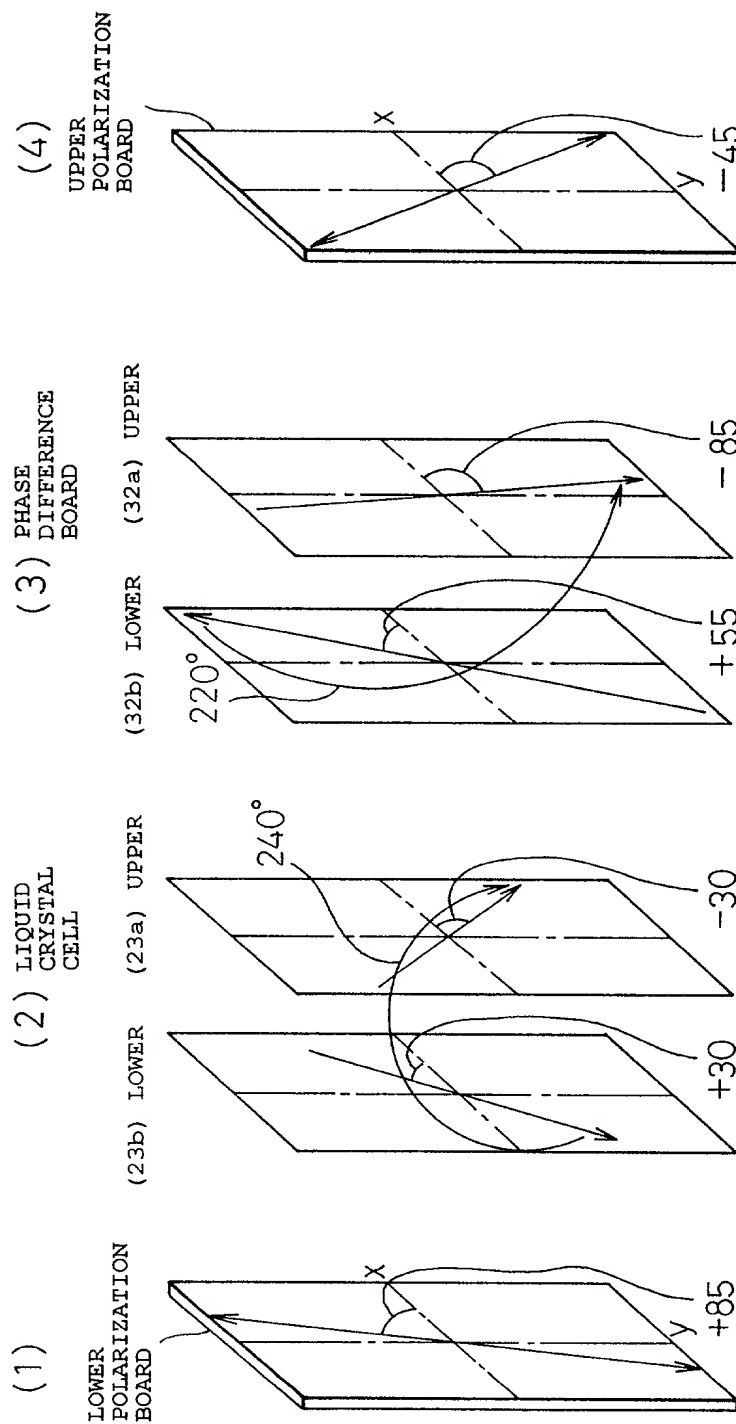


Fig.21

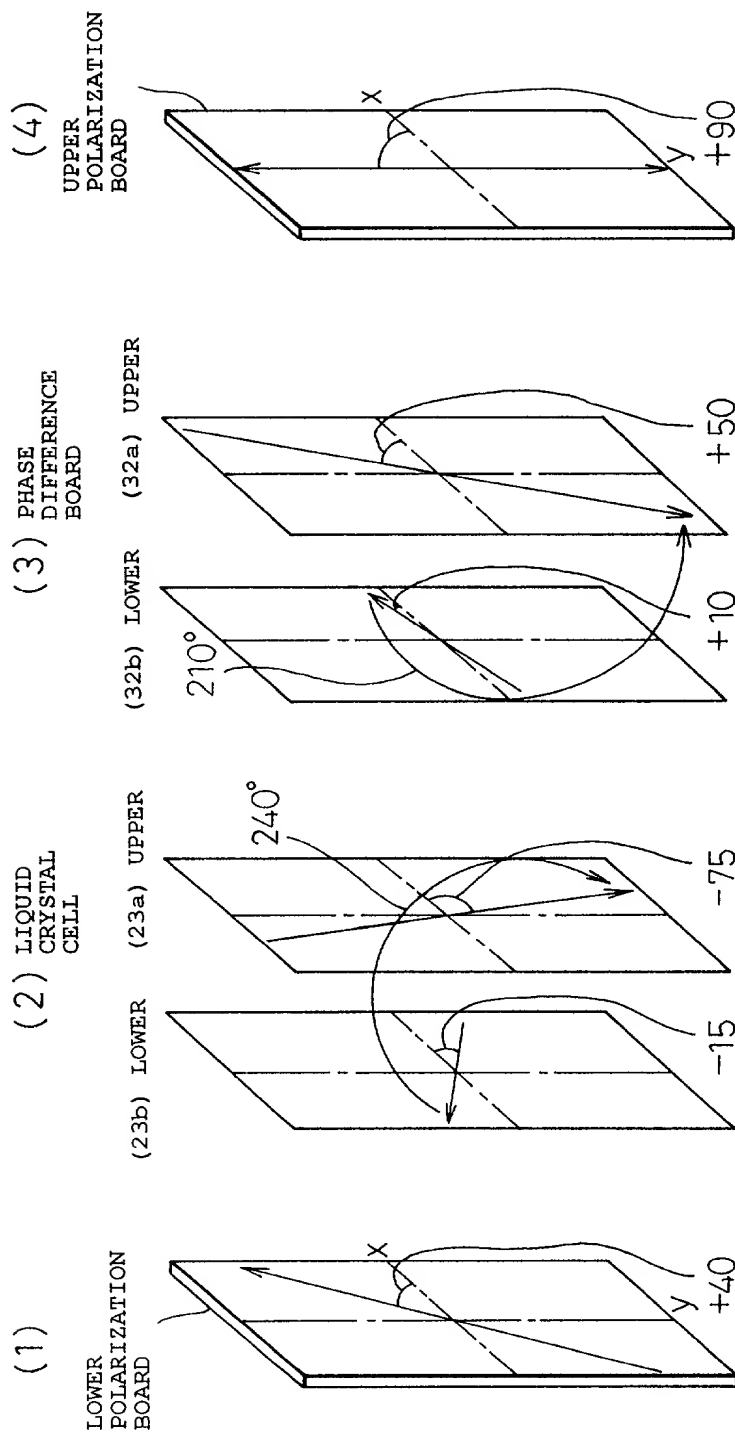


Fig.22

	TWISTED PHASE DIFFERENCE 220°	TWISTED PHASE DIFFERENCE 200°	PHASE DIFFERENCE BOARD	REMARK
WHITE-Y (x, y)	0.259 NORMAL (0.338, 0.377)	0.260 NORMAL (0.346, 0.387)	0.260 LIGHT GREEN (0.33, 0.366)	0 (v)
HALF TONE (x, y)	GRAY (0.329, 0.351)	GRAY (0.333, 0.351)	BROWN (0.384, 0.417)	2.05 (v)
BLACK-Y (x, y)	0.0187 BLUE-BLACK (0.22, 0.194)	0.007 BLACK (0.323, 0.165)	0.021 BLUE-BLACK (0.245, 0.194)	2.15 (v)
CONTRAST	13	35	11	1.95/2.15

Fig.23

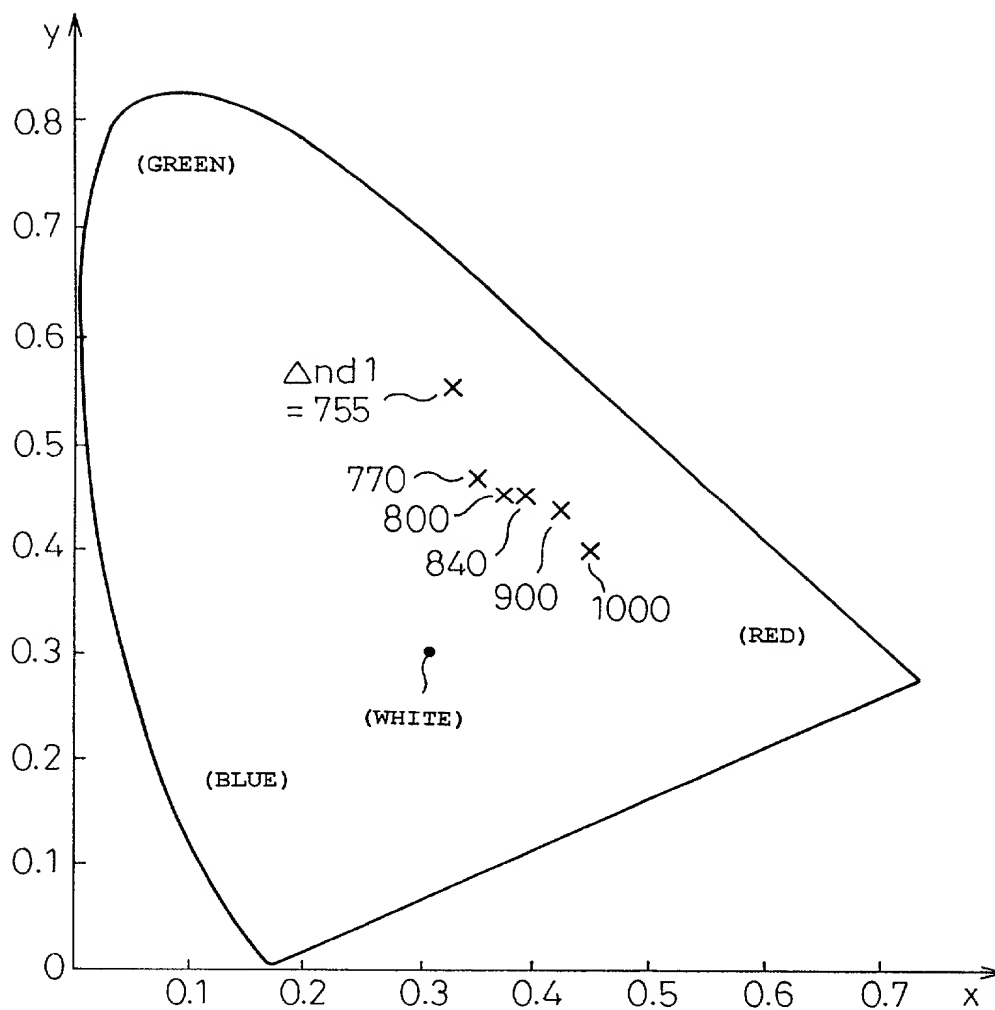


Fig.24

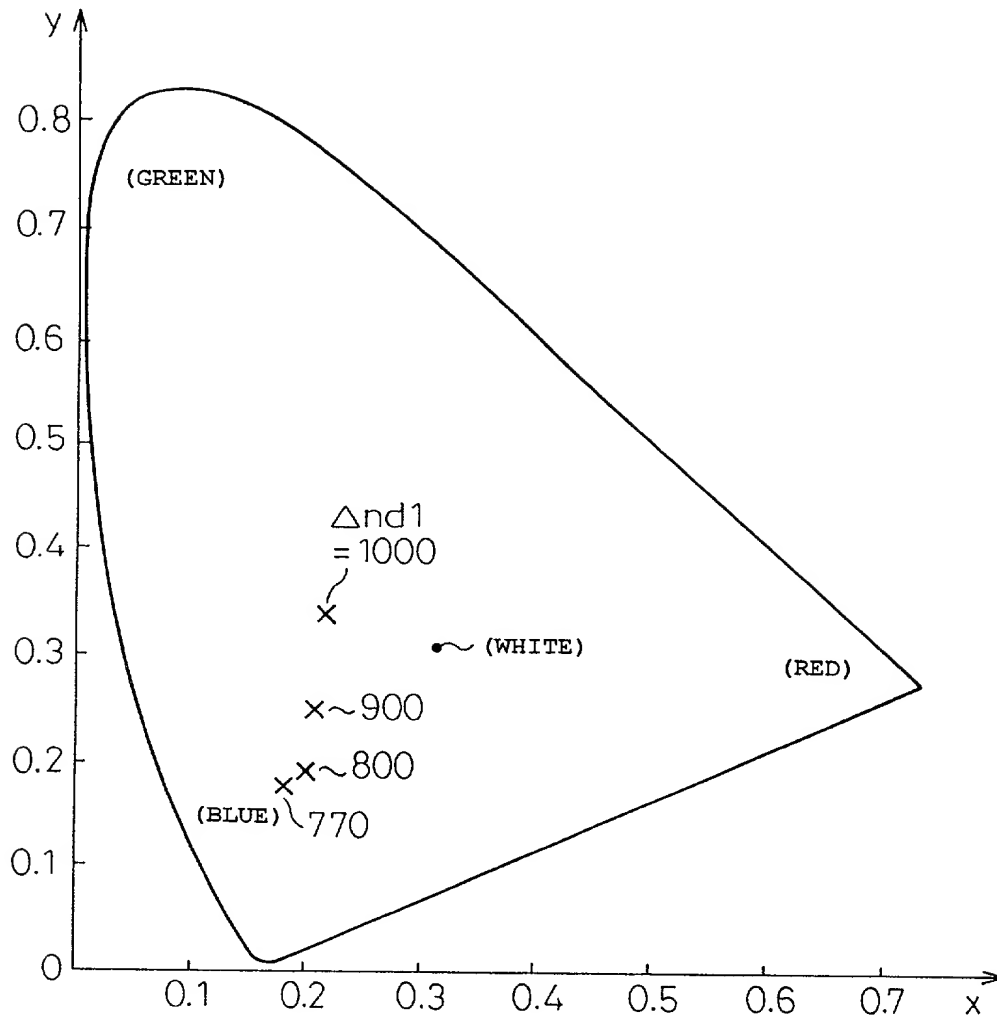


Fig.25A

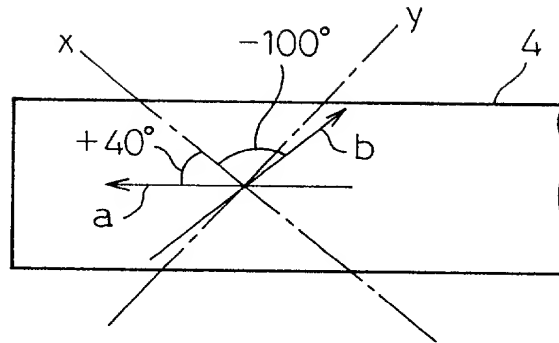


Fig.25B

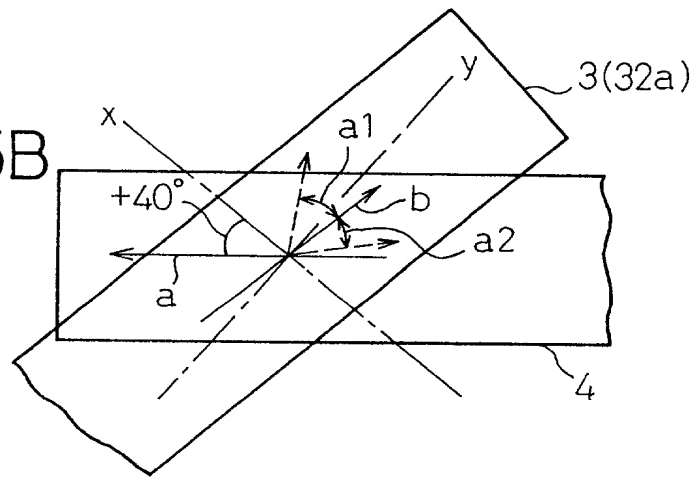


Fig.25C

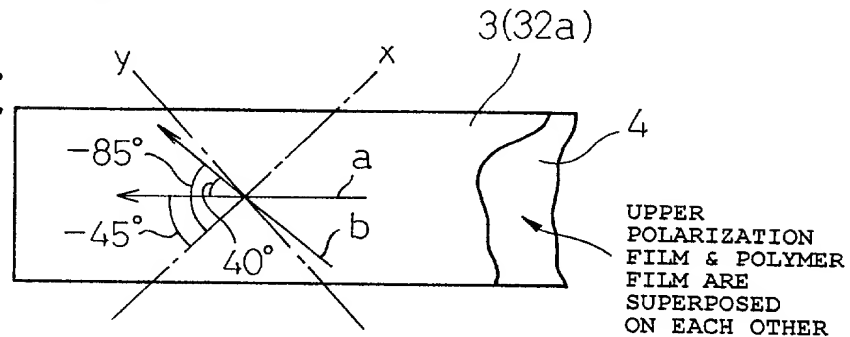


Fig.25D

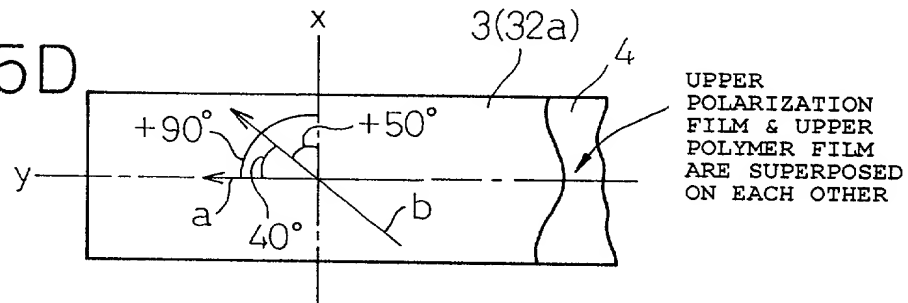


Fig. 26

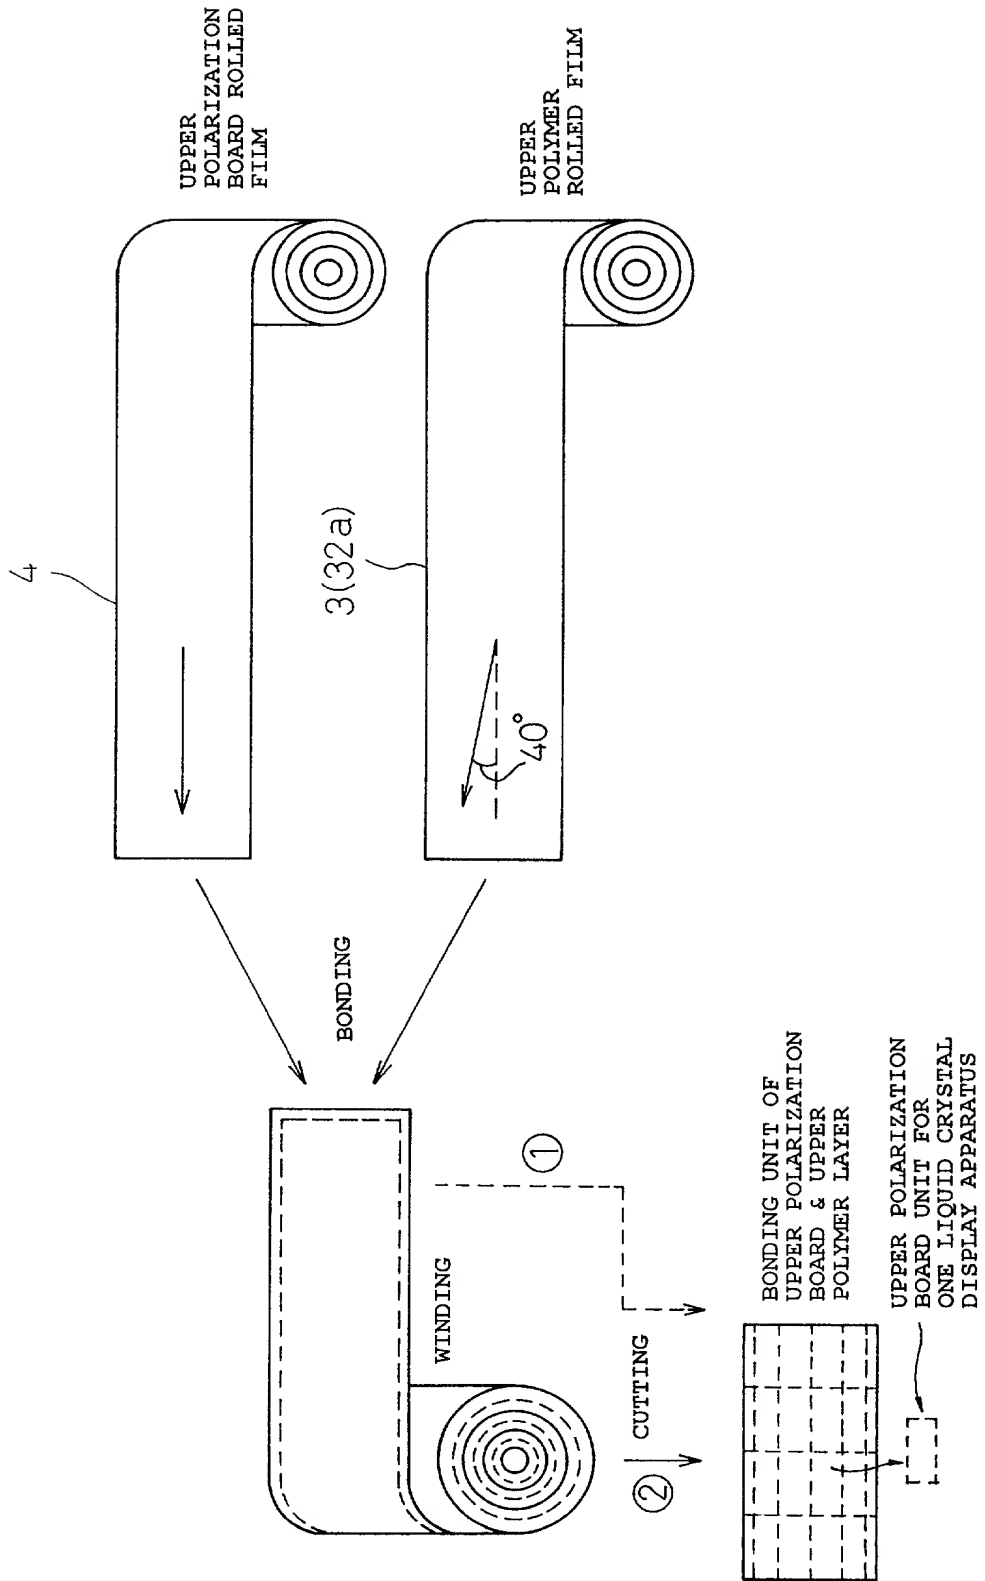


Fig.27

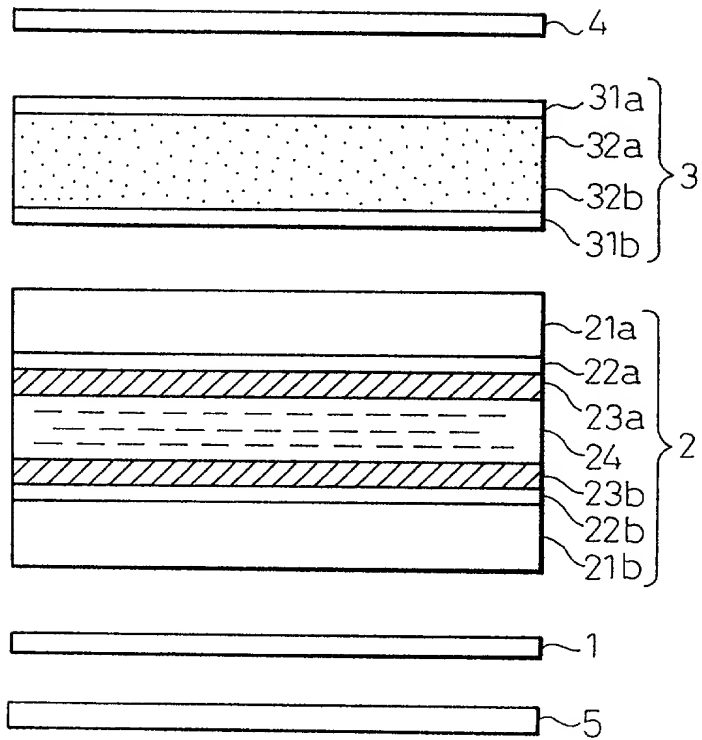


Fig.28

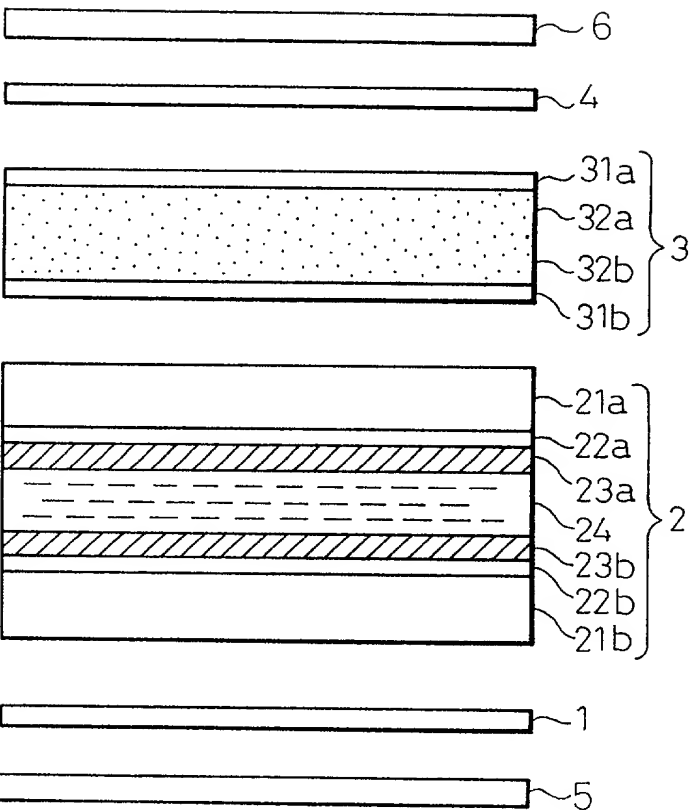


Fig. 29


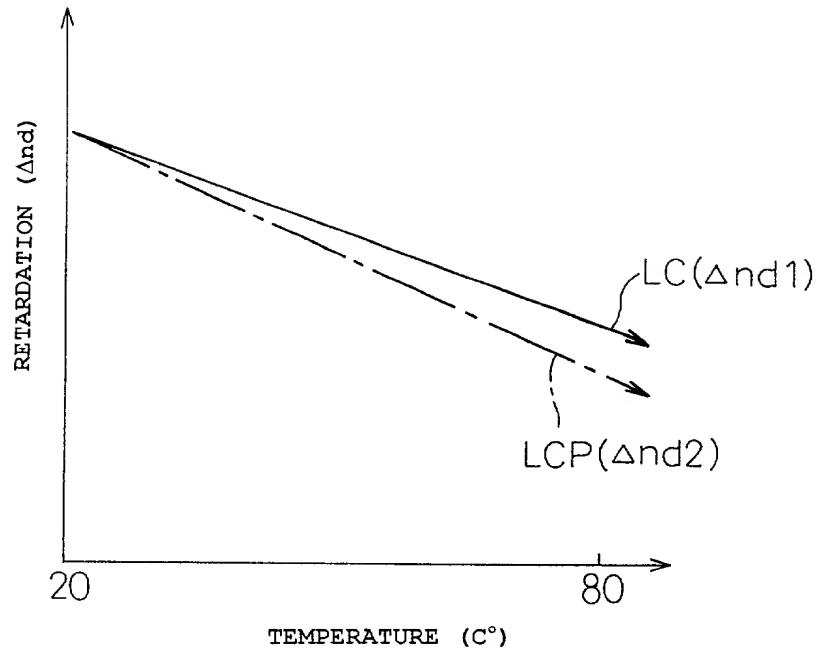


Fig. 30

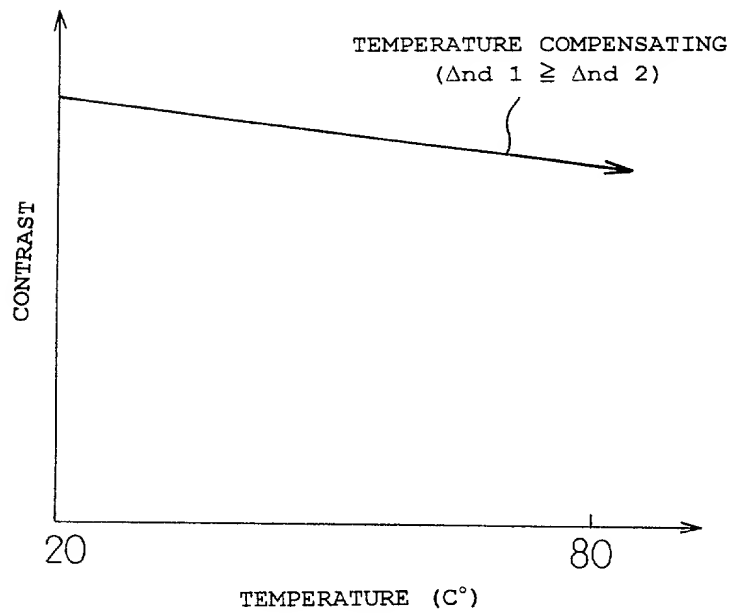

LIST OF REFERENCE CODES

- 1 ... FIRST POLARIZATION BOARD
- 2 ... LIQUID CRYSTAL ELEMENT
- 3 ... TWISTED PHASE DIFFERENCE BOARD
- 4 ... SECOND POLARIZATION BOARD
- 21b ... FIRST SUBSTRATE
- 21a ... SECOND SUBSTRATE
- 22b ... FIRST TRANSPARENT ELECTRODE
- 22a ... SECOND TRANSPARENT ELECTRODE
- 23b ... FIRST ALIGNMENT FILM (LOWER)
- 23a ... SECOND ALIGNMENT FILM (UPPER)
- 24 ... LIQUID CRYSTAL LAYER
- 31a ... HARD COAT LAYER
- 31b ... TRANSPARENT FILM SUBSTRATE
- 32a ... UPPER POLYMER
- 32b ... LOWER POLYMER

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

CIT- 4903-US

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

A LIQUID CRYSTAL DISPLAY APPARATUS AND A

METHOD FOR MANUFACTURING THE SAME

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ __月__日に提出され、米国出願番号または特許協定条約国際出願番号を____とし、
(該当する場合) _____ に訂正されました。☐ was filed on August 25, 1999
as United States Application Number or
PCT International Application Number
PCT/JP99/04590 and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

10-238579(Pat. Appln.)

(Number)
(番号)

Japan

(Country)
(国名)

(Number)
(番号)

(Country)
(国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

25/August/1998

(Day/Month/Year Filed)
(出願年月日)

(Day/Month/Year Filed)
(出願年月日)

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration

委任状：私は、下記発明者として、以下の弁理士及び代理人、またはそのいずれかをここに選任し、本願の手続きを遂行すること並びにこれに関する一切の行為を米国特許商標庁に対して行うことを委任する。(代理人氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list agent's name(s) and registration number(s))

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, Reg. No. 22,540; Douglas B. Henderson, Reg. No. 20,291; Ford F. Farabow, Jr., Reg. No. 20,630; Arthur S. Garrett, Reg. No. 20,338; Donald R. Dunner, Reg. No. 19,073; Brian G. Brunsvold, Reg. No. 22,593; Tipton D. Jennings, IV, Reg. No. 20,645; Jerry D. Voight, Reg. No. 23,020; Laurence R. Hefter, Reg. No. 20,827; Kenneth E. Payne, Reg. No. 23,098; Herbert H. Mintz, Reg. No. 26,691; C. Larry O'Rourke, Reg. No. 26,014; Albert J. Santorelli, Reg. No. 22,610; Michael C. Eimer, Reg. No. 25,857; Richard H. Smith, Reg. No. 20,609; Stephen L. Peterson, Reg. No. 26,325; John M. Romary, Reg. No. 26,331; Bruce C. Zotter, Reg. No. 27,680; Dennis P. O'Reilley, Reg. No. 27,932; Allen M. Sokal, Reg. No. 26,695; Robert D. Bajefsky, Reg. No. 25,387; Richard L. Stroup, Reg. No. 28,478; David W. Hill, Reg. No. 28,220; Thomas L. Irving, Reg. No. 28,619; Charles E. Lipsey, Reg. No. 28,165; Thomas W. Winland, Reg. No. 27,605; Basil J. Lewis, Reg. No. 28,818; Martin I. Fuchs, Reg. No. 28,508; E. Robert Yoches, Reg. No. 30,120; Barry W. Graham, Reg. No. 29,924; Susan Haberman Griffen, Reg. No. 30,907; Richard B. Racine, Reg. No. 30,415; Thomas H. Jenkins, Reg. No. 30,857; Robert E. Converse, Jr., Reg. No. 27,432; Clair X. Mullen, Jr., Reg. No. 20,348; Christopher P. Foley, Reg. No. 31,354; John C. Paul, Reg. No. 30,413; Roger D. Taylor, Reg. No. 28,992; David M. Kelly, Reg. No. 30,953; Kenneth J. Meyers, Reg. No. 25,146; Carol P. Einaudi, Reg. No. 32,220; Walter Y. Boyd, Jr., Reg. No. 31,738; Steven M. Anzalone, Reg. No. 32,095; Jean B. Fordis, Reg. No. 32,984; Barbara C. McCurdy, Reg. No. 32,120; James K. Hammond, Reg. No. 31,964; Richard V. Burgujian, Reg. No. 31,744; J. Michael Jakes, Reg. No. 32,824; Thomas W. Banks, Reg. No. 32,719; M. Paul Barker, Reg. No. 32,013; Bryan C. Diner, Reg. No. 32,409; Christopher P. Isaac, Reg. No. 32,616; Andrew C. Sonu, Reg. No. 33,457; Dirk D. Thomas, Reg. No. 32,600

書類の送付先：

Send Correspondence to:

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.
1300 I STREET, N.W.
WASHINGTON, D.C. 20005-3315

直通電話連絡先：(名称及び電話番号)

Direct Telephone Calls to: (name and telephone number)

ARTHUR S. GARRETT
202-408-4091

唯一のまたは第一の発明者の氏名	Full name of sole or first inventor	
同発明者の署名	日付	Inventor's signature Date
住所	Residence	
国籍	Citizenship	
郵便の宛先	Post Office Address	

1-10 Yasushi Kaneko
Yasushi Kaneko April 18, 2000
Tokorozawa-shi, Saitama, Japan SPX
Japanese
c/o CITIZEN WATCH CO., LTD. Technical Laboratory, 840, Aza Takeno, Oaza Shimotomi, Tokorozawa-shi, Saitama 359-8511, Japan

第二の共同発明者の氏名 (該当する場合)	Full name of second joint inventor, if any	
同第二発明者の署名	日付	Second inventor's signature Date
住所	Residence	
国籍	Citizenship	
郵便の宛先	Post Office Address	

2-0 Hiroshi Tsukada
Hiroshi Tsukada April 18, 2000
Tanashi-shi, Tokyo, Japan SPX
Japanese
c/o CITIZEN WATCH CO., LTD. Tanashi Factory, 1-12, Honcho 6-chome, Tanashi-shi, Tokyo 188-8511, Japan

(第三またはそれ以降の共同発明者に対しても同様な情報及び署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)